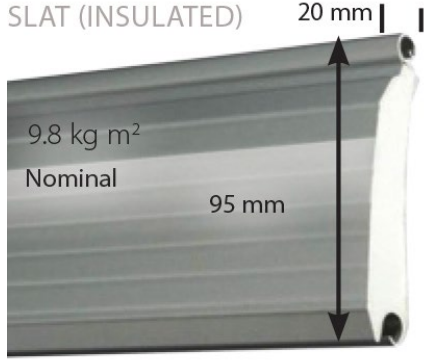


DESCRIPTION	The 9501 Insulated Roller Door uses a twin walled steel slat with insulation. Electrically Operated with Manual Pin Locks. Tested to LPS1175 Security Level 1 – Suitable for Internal Use Only.		
	Suitable for high security office, commercial and industrial applications.		

DOOR DIMENSIONS	Maximum Overall Width: 7000mm	Maximum Overall Height: 7000mm	Headroom Required: Up to 500mm
-----------------	---	--	--

CURTAIN

DESCRIPTION	<p>Twin Walled Steel Slat with Insulation.</p> <ul style="list-style-type: none"> Heat transmission performance for the 95 mm insulated Lath: Centre = 1.1 W/m²K, Quirk = 3.2 W/m² Max width 7000 mm Max height 7000 mm Max area 44 m Wind Class 5 	 <p>SLAT (INSULATED) 20 mm 9.8 kg m² Nominal 95 mm</p>
-------------	---	--

DIMENSIONS	Nominally 95mm high by 20mm thick
------------	-----------------------------------

WEIGHT	9.8kg per square metre
--------	------------------------

ASSEMBLY	Steel bottom slat with rubber seal.
----------	-------------------------------------

BOTTOM SLAT DIMENSIONS	
------------------------	---

STANDARD COLOURS	Galvanised Finish <i>Can be powder coated to standard RAL or BS colour for a surcharge</i>
------------------	---


GUIDE RAILS

DESCRIPTION	3 mm galvanised steel channels.
-------------	---------------------------------

STANDARD COLOURS	Galvanised Finish <i>Can be powder coated to standard RAL or BS colour for a surcharge</i>
------------------	---

DIMENSIONS

80mm wide x 73mm deep – Bullet Locks Housing fixed to guide rails

**SHUTTER BOX****CONSTRUCTION**

Two or three-piece folded steel casing with steel end plates.

BOX ENDS

Shutter box is assembled on a steel endplate

BOX SIZES**Clear opening height:**

1750mm

2500mm

3400mm

4600mm

*To underside of box***Box size:**

300mm

350mm

400mm

450mm

STANDARD COLOURS

Galvanised Finish

*Can be powder coated to standard RAL or BS colour for a surcharge***INSTALLATION****FEATURES**

This product can be installed internally ONLY. Please refer to installation instructions.

OPERATIONS**ELECTRIC****Minimum shutter width 1000mm.**

Operated by 240V or 415V GFA Industrial Drive with Manual Chain Override. A choice of motors and controls based on the size of the opening and the application.

