



Security Direct
property protection

Large Product Range ☐
Competitive Prices ☐
25 years Experience ☐

Diamond Door Trackless Retractable Grille



SECURITYDIRECT
Specialist Security Solutions

Diamond Door - Untracked



Key Benefits

- Domestic, Commercial and Retail
- Retractable Security Grille
- Internally Fixed
- Medium Security
- No Top and Bottom Tracks
- Hinges 90 degrees flat to the wall as standard
- Single Point Surface Mounted Locking System
- "X" Lattice Design
- Powder Coated White as standard
- Stocked Product - 2-3 Day Delivery

www.securitydirectuk.com

Diamond Door - Untracked



Product Overview

Description

The Diamond security grille is a Medium security grille. Unlike other retractable grilles, the Diamond grille doesn't have a Top or Bottom Track. The advantage of being trackless is that it folds back to the wall and then hinges 90 degrees flat to the wall. The Diamond Grille comes in a standard height of 2000mm and come in several widths. Comes as standard with a Single Point Surface Mounted Slam Lock, Castor and "U" Brackets. The product is usually kept in stock and is available for delivery in 2-3 working days.

Common use

Fitted internally to provide security for Doors and Patio Doors

Maximum Width

1950mm

Maximum Height

2000mm

Weight

12kgs m/2

Standard Finish

Powder Coated White RAL9016.


Lead Time

2-3 Days (subject to change)

Diamond Door - Untracked



Specification

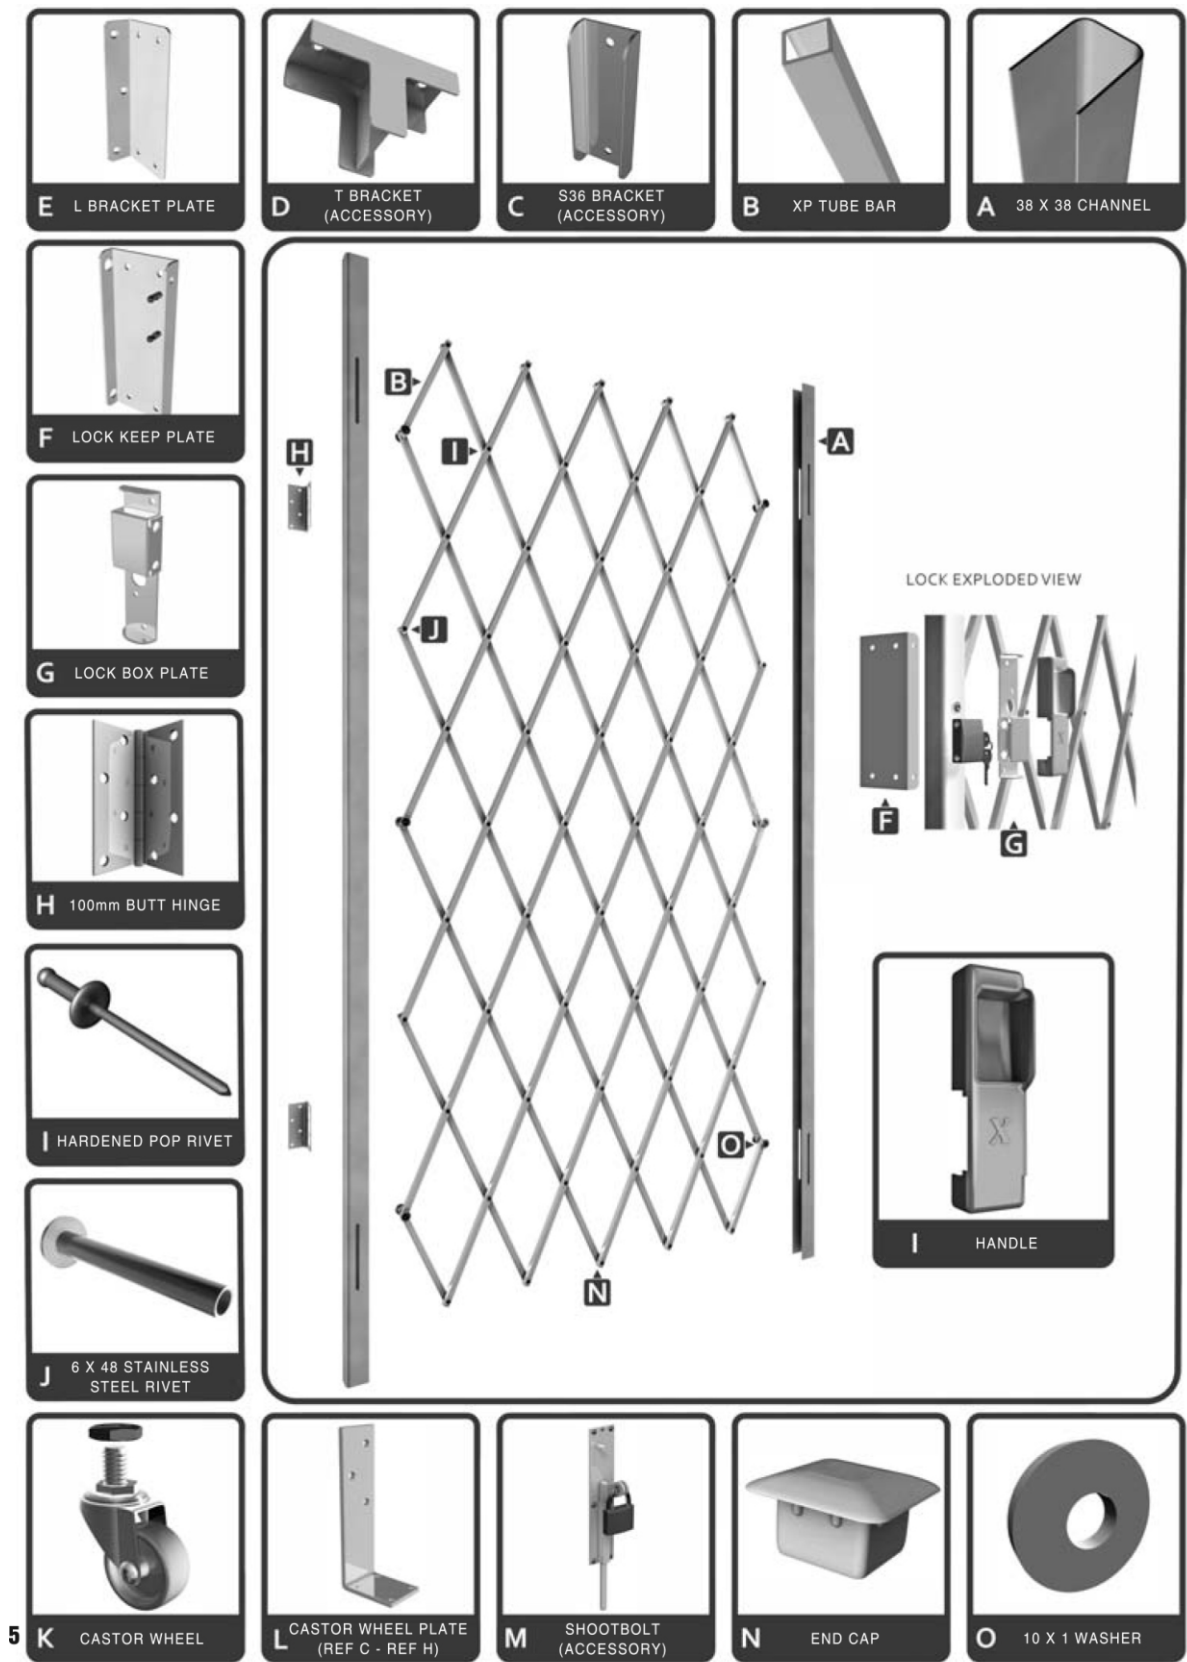




Specification

SINGLE DOOR OPENINGS

Diamond Doors are designed to be easily fitted by any DIY person. However with the use of the various components, these installations can be made far more secure and effective.


Diamond Doors are supplied with a surface mounted, single point slamlock, which can be fitted on the left or right, inside or outside of any opening.

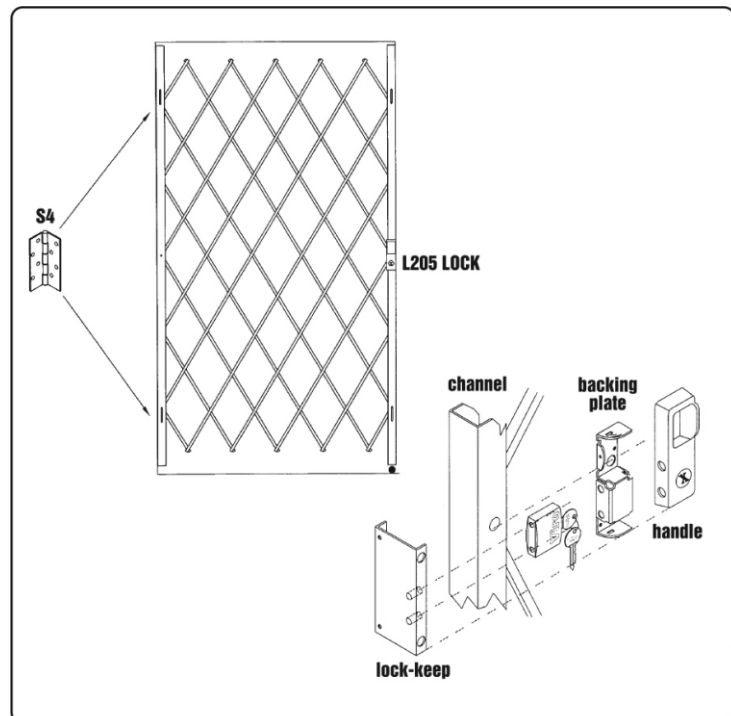

DOOR OPENINGS

Diamond Doors come in a range of 8 sizes to fit openings from 840mm wide to 1950mm wide in a single span.

These doors are simple to fit and can be folded out of the way so as not to obstruct the access through the doorway.

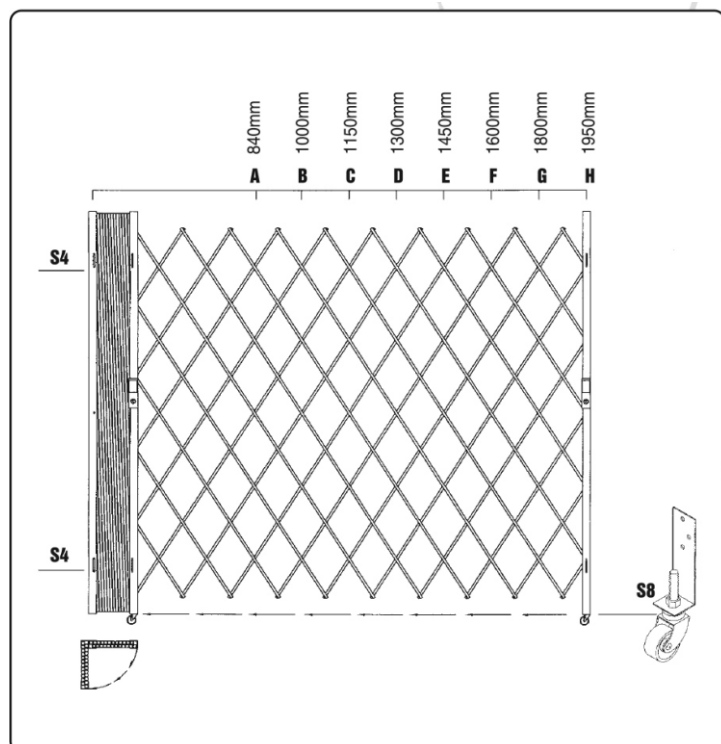


Diamond Door - Untracked



Specification

Double Stack Options

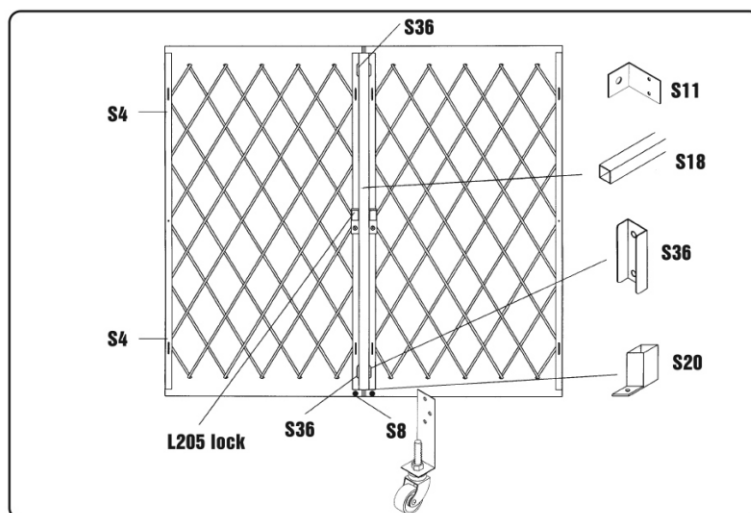


LOCKING TWO DOORS IN CENTRE WITH POST

This system can be used on sliding doors where the use of a post does not impede access, for example left hand or right hand patio doors.


This makes a very secure fitting and allows for doors to lock in the centre and fold back out of the way when not in use.

Using S36 'U' brackets makes the installation more secure.

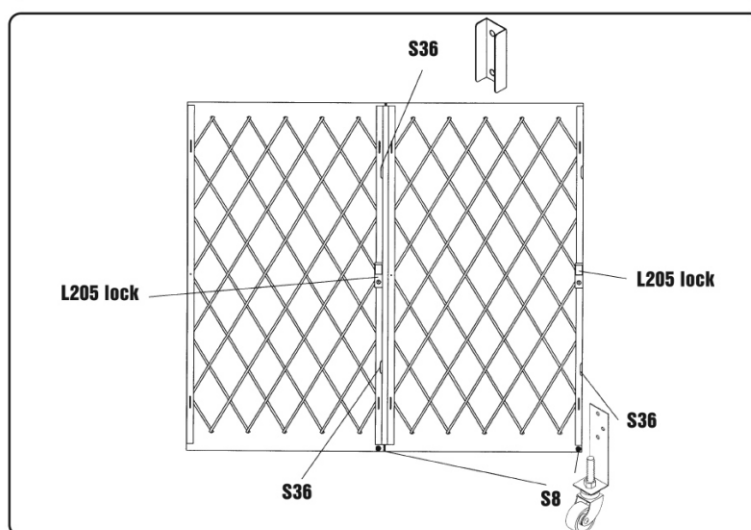

LOCKING TWO DOORS LEFT OR RIGHT HAND WITH POST

The same applies as in the drawing above but the SAFTIDORS will lock either left hand or right hand. This is preferable when the fixed section of a patio door must remain protected and just the opening section is continually used.

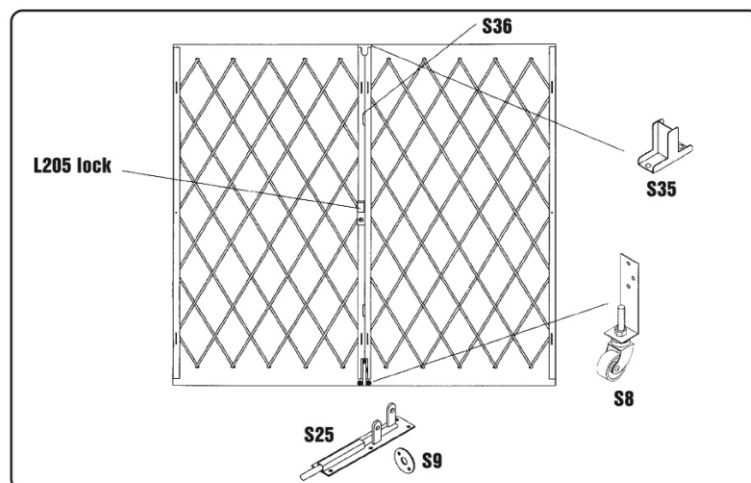

LOCKING TWO DOORS IN THE CENTRE WITHOUT A POST

This method is used when centre locking patio doors need to be secured and the track is not required or insufficient space is available to fix track. With the S35 'T' bracket at the top and S25 shootbolt at the bottom the doors are secured in the centre. This is a very inexpensive fitting.

With this method of fitting there are no tracks or other fittings to obstruct the entrance.

Diamond Door - Untracked



Specification

