


## Security Direct property protection

Large Product Range Competitive Prices 25 years Experience

# Compact Fire Rated Roller Shutter





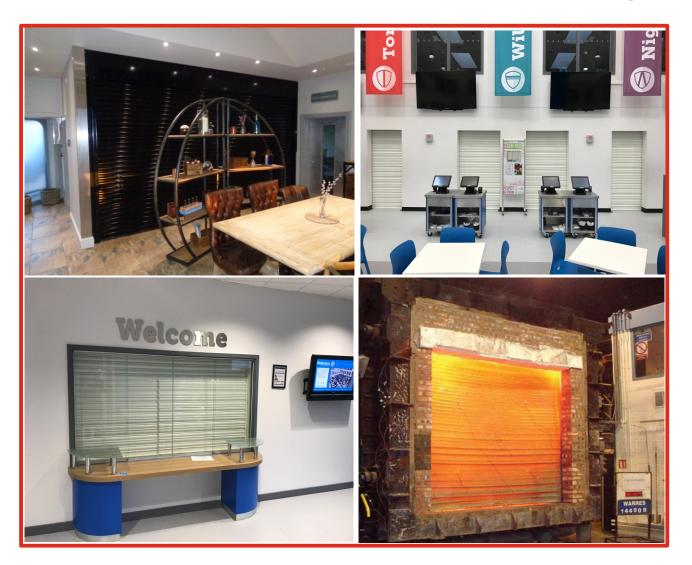

### **Key Benefits**

- Kitchen Serveries, Reception Counters, Stores
- Tested and Certified to BS EN 167034:2014
- 30, 60mins, 120mins and 240mins Fire Rating
- 75mm Curved steel slats
- Up to 6m wide openings
- Galvanised Steel
- Single Phase Tube Motor
- Fully automated controls fire closing
- Galvanised as standard, Powder Coating available at an extra cost
- 2-3 week lead time (Subject to change)



### **Product Overview**

#### Description

The compact Fire Shutter is ideal for smaller openings ie; Kitchen Serveries and Reception Counters. The box is smaller, neat and compact because it uses a single phase tube motor, located inside the barrel. The compact Fire SHutter is tested and certified to new fire standards BS EN 16034:2014 and is CE Marked to BS EN 13241-1:2003. It's available in 30mins, 60mins, 120mins and 240mins Fire ratings to suit all levels of fire protection.

#### Common use

Kitchen Serveries, Reception Counters, Stores

Maximum Width 6000mm (depending on height)

Maximum Height 4800mm (depending on width)

Weight 12kgs m/2

**Standard Finish** Galvanised as standard. Powder Coating a BS or RAL colours are available at an extra cost.

Lead Time 10-15 working days (subject to change)

### **Specification**

#### **CURTAIN SLAT**

A standard the Compact Fire Shutter is supplied with a Single skin 76mm (3") curved steel slat. Wall thickness 0.7mm,0.9mm, or 1.2mm, depending on fire rating and size of the opening.



www.securitydirectuk.com



### **Specification**


#### SHUTTER BOX

Galvanised steel casing & end plates as standard. Galvanised finish as standard, powder coating available at an additional cost.

Guide Height (mm) - Plate Size (mm) - (Internal/External Fit) 1399 - 250/250 1999 - 250/300 2599 - 300/300 2999 - 300/350 3599 - 350/350 3999 - 350/400 5000 - 400/400

\* Endplate sizes shown as a guide only and may increase dependent on shutter width.

#### **BOTTOM RAIL** Galvanised steel 'T' shaped bottom rail is provided as standard.








### **Specification**


#### **GUIDE CHANNELS**

Galvanised steel "U" channel guides. The guide size varies dependent on application/size, either 65mm, 75mm or 100mm. Galvanised finish as standard.




#### FACE FIX STANDARD GUIDE DETAIL

50MM GUIDE AND 75 X 50MM ANGLE




65MM GUIDE AND 75 X 50MM ANGLE



#### **REVEAL FIX STANDARD GUIDE DETAIL**

#### 50MM GUIDE AND 75 X 50MM ANGLE



#### OPERATION

The Compact Fire Shutters are only available with a Single Phase Tube Motor. The fire shutter can be supplied with a basic switch, to open and close the shutter. For total peace of mind, the fire shutters can be fully automated, for example; Connected to the Fire Alarm and Battery Backup in case of a power failure. Other control options available include; Audio Visual Panel, Staged Descent, Emergency Release Switches, and Manual Override.

#### www.securitydirectuk.com



### Colours

