




Section  
(scale 1:10)

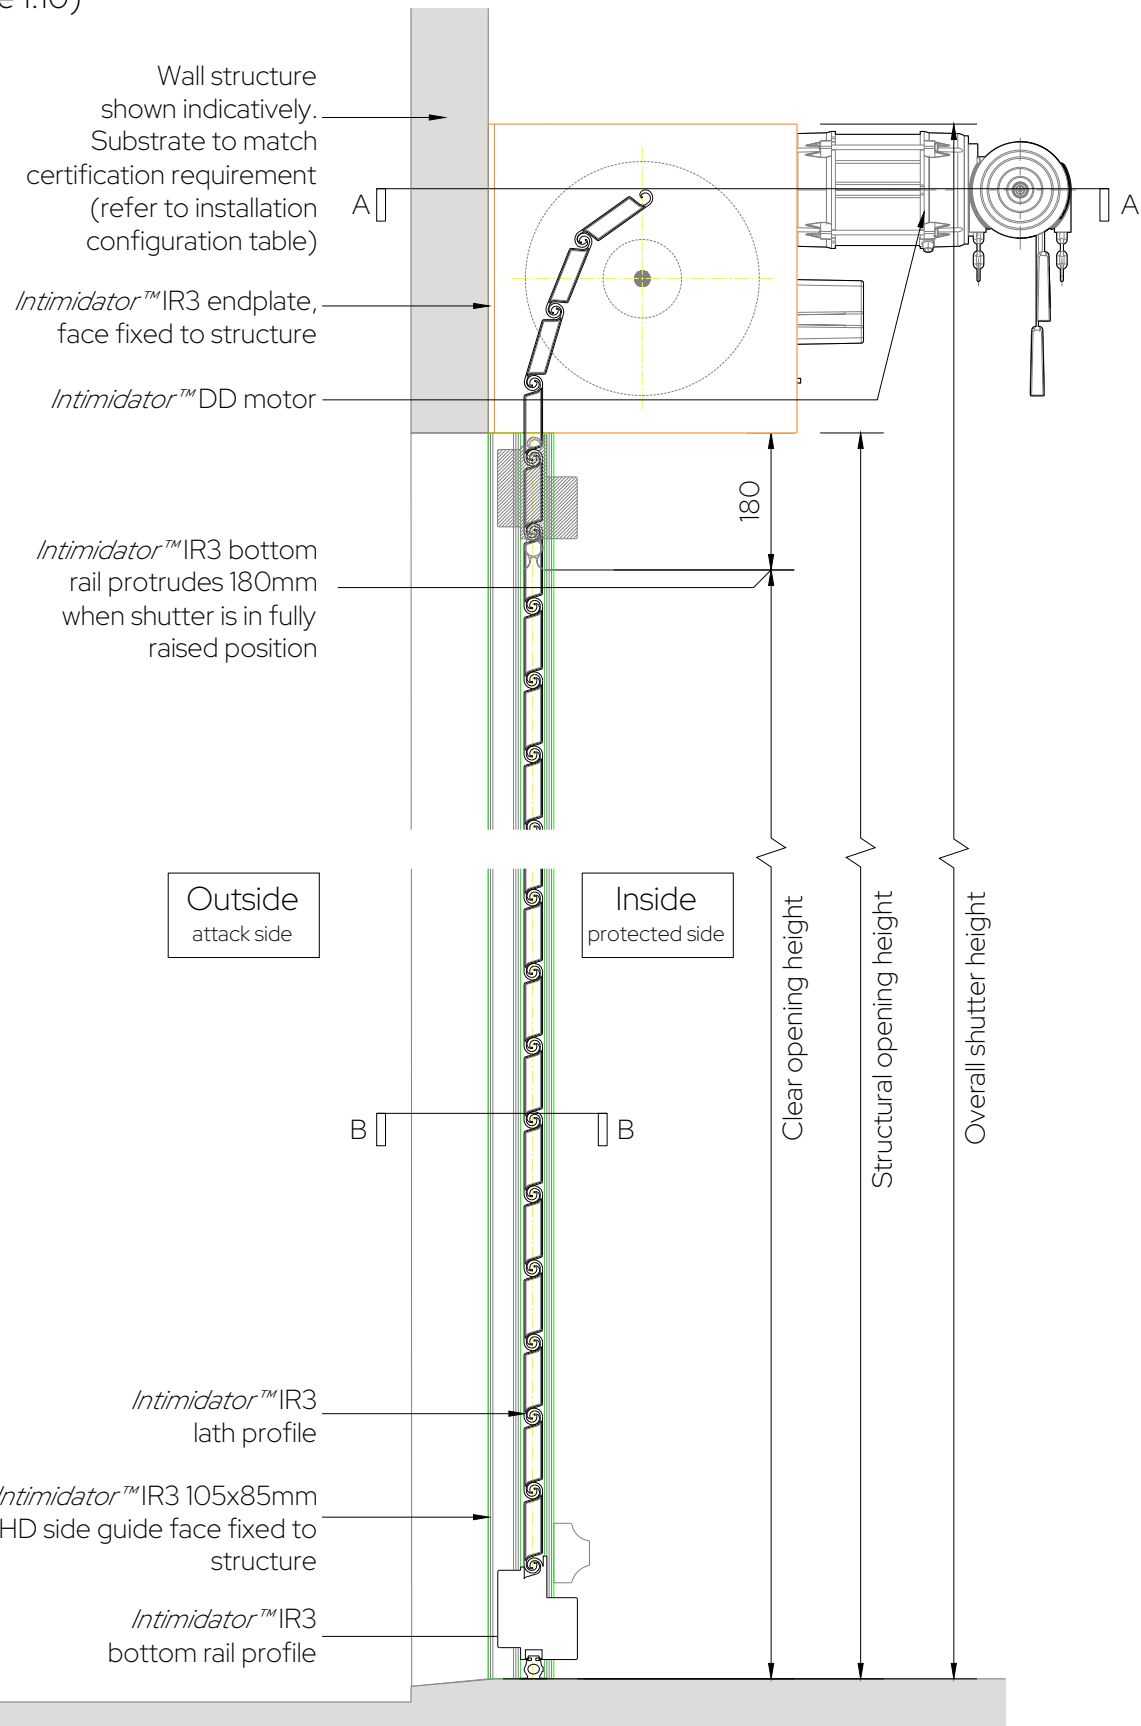

Plan Through: A-A  
(scale 1:10)

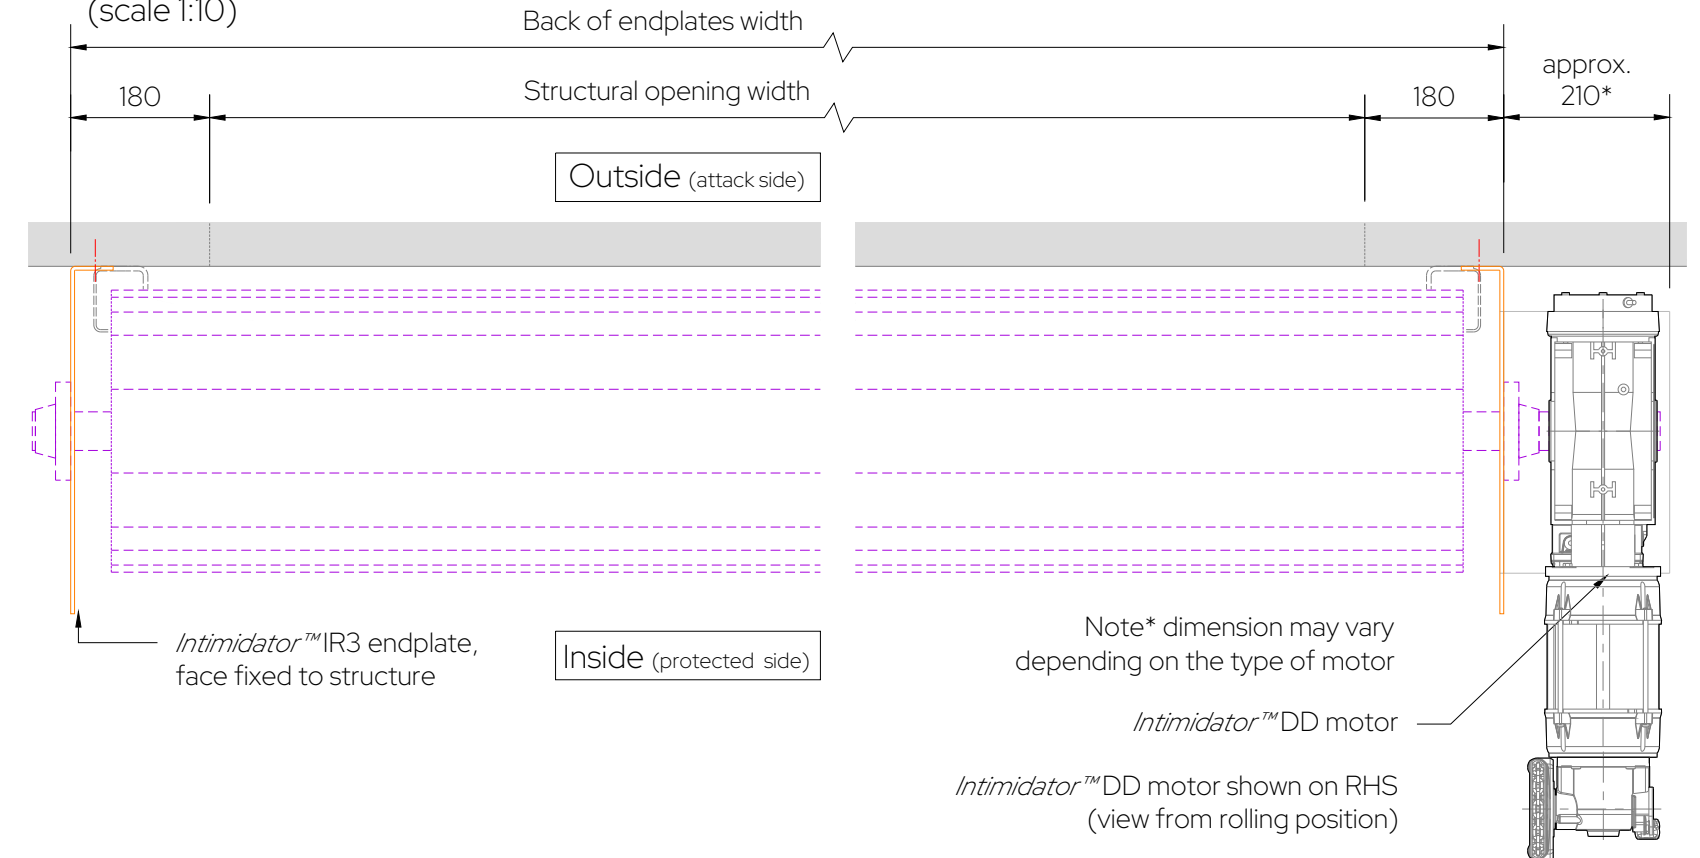


Plan Through: B-B  
(scale 1:10)

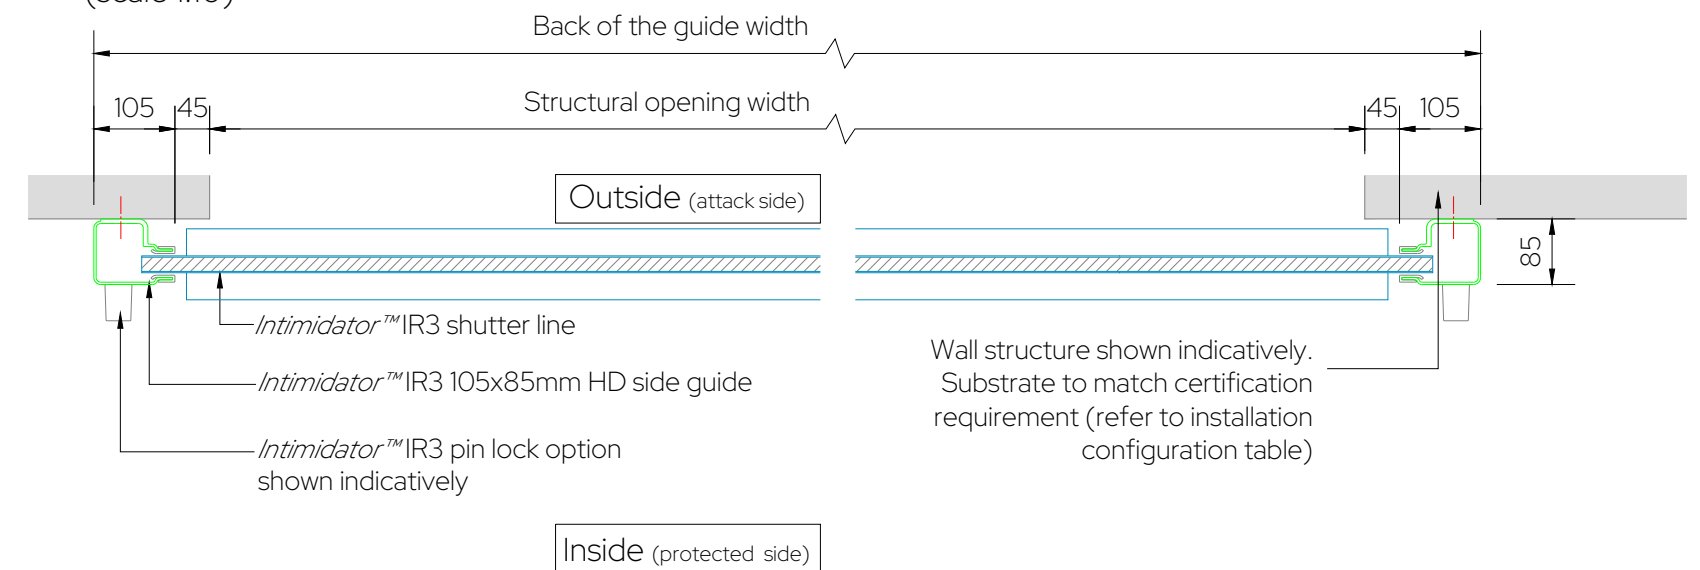


NOTES: This drawing is copyright of CGT Security Ltd and must not be reproduced whole or in part without prior written consent.


Shutter elevation - shown indicatively  
(scale NTS)

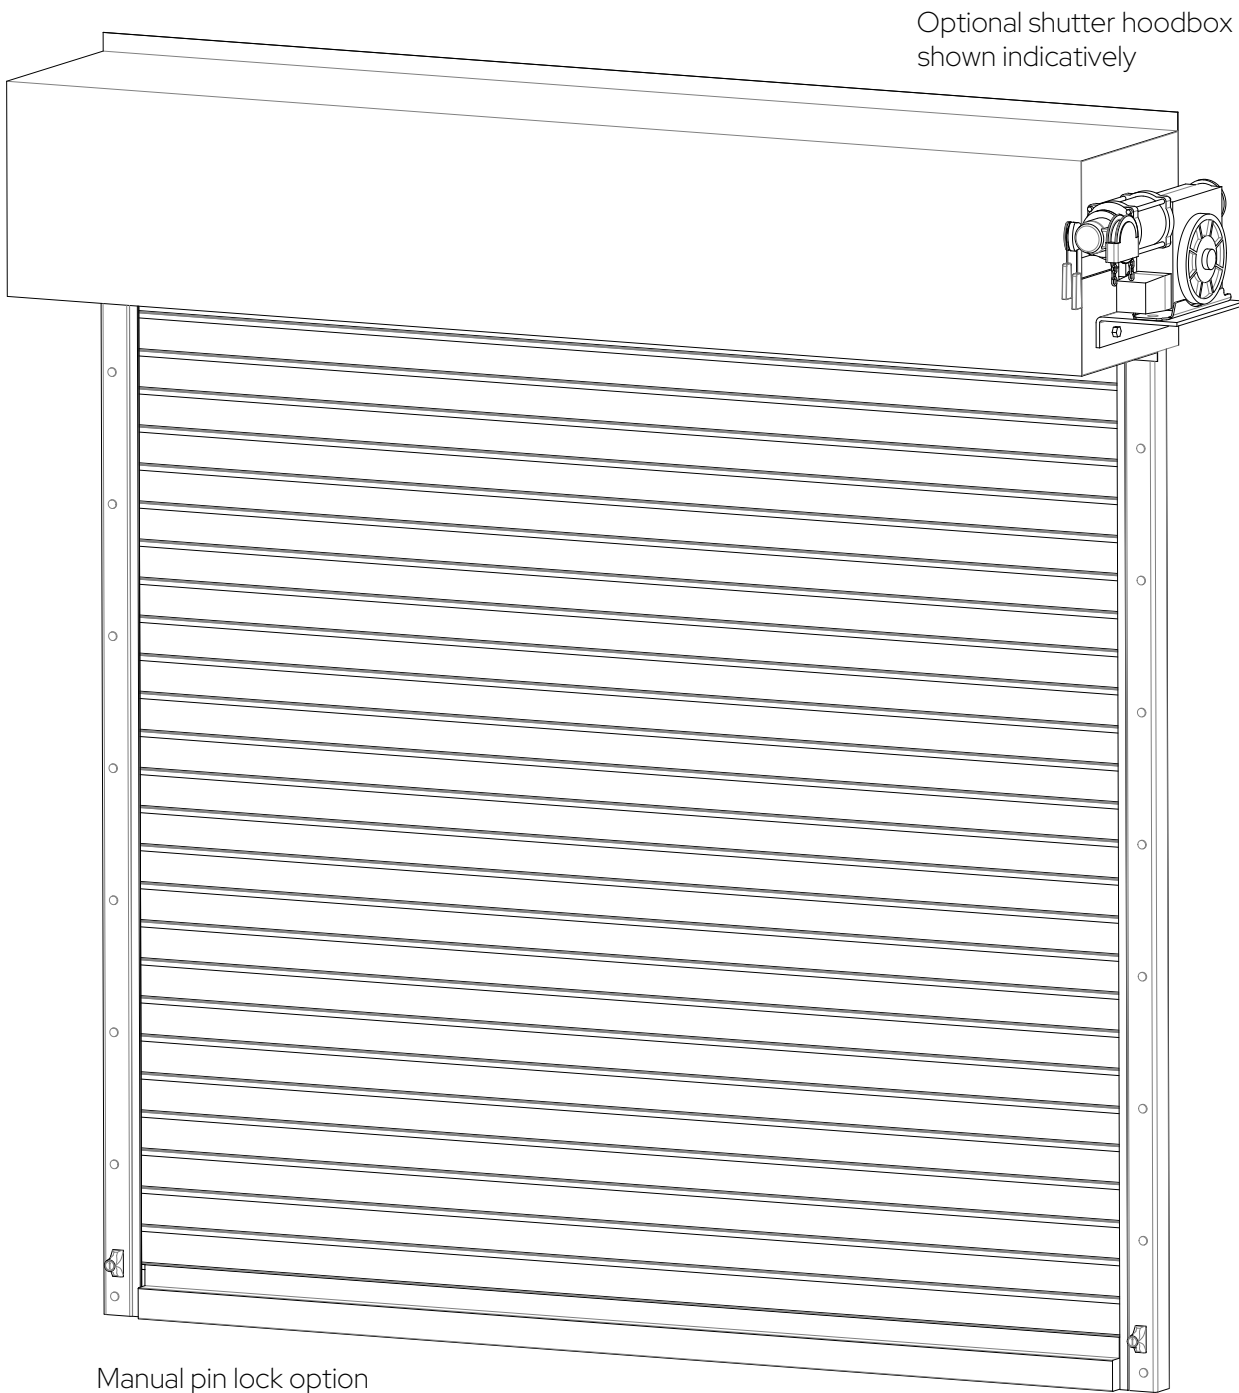

Intimidator™ IR3 lath profiles  
(scale 1:10)

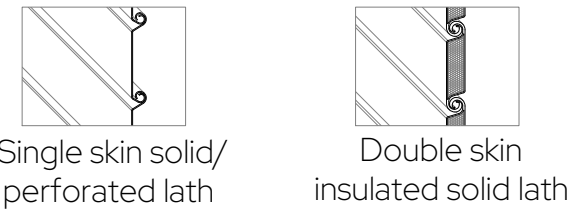

Intimidator™ IR3 locking options  
(scale 1:10)

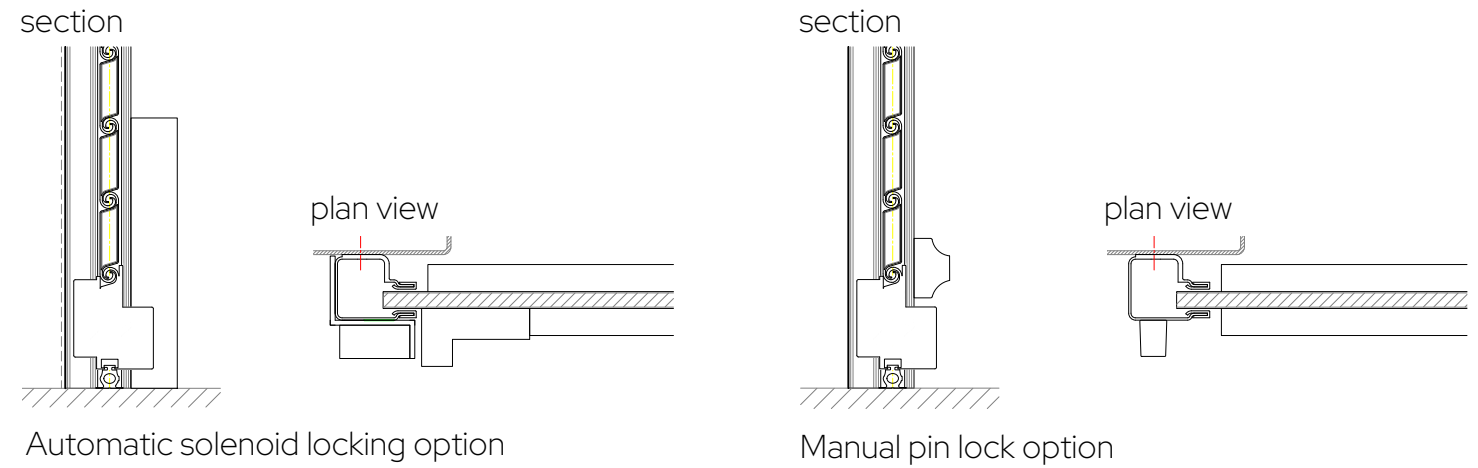

INTIMIDATOR™ IR3 SPECIALIST ROLLER SHUTTER SYSTEMS				
Security Rating	Minimum structural opening width	Maximum structural opening width	Minimum structural opening height	Maximum structural opening height
C5 (SR3)	1000mm	8000mm	1000mm	8000mm

NOTE: The installation shall be direct to the substrate and not via intermediate substrates, such as plasterboard

Installation Configurations				
Configuration	Brickwork	Blockwork	Concrete	Steel (Minimum 3mm thickness and 150mm wide)
Internally face fitted roller shutter	✓	✓	✓	✓

NOTES: This drawing is copyright of CGT Security Ltd and must not be reproduced whole or in part without prior written consent.