


Frame Section



Meeting Style

RH OUT FROM PULL SIDE (TBC)

FURNITURE BREAKDOWN

1 off Single SR 2 with Rockwool Core

Door Leaf Construction:
45mm thick, constructed from two 1.5mm thick galvanised steel skins bonded to a structural rockwool core

Frame Construction:
1.5mm thick galvanised steel, pressed to form a Single Rebate profile.

4 x Standard Dog Bolt Hinge
Assa 765 Modular Sashlock (70mm Setback)
Assa Double Cylinder-10 KEYS
1 Pair of Assa 18256 Escutcheons
Pair of Assa 640 Lever(s) on rose
Geze TS4000

Standard Astragal

Powder Coat RAL 7047 Satin

100mm Single Rebate Frame
Aluminium 564a Cill
188s Seal
Jacking Screws/Frame Caps
Brick Fixings



Fire Rating:240 Minutes (Certified to BS 476 - Non CE Marked)
Security Rating:LPS1175 SR2 (Mortice)

S/O= 895mm(w) x 2031mm(h)
F/S= 885mm(w) x 2025mm(h)

Total Door Weight: 81 kgs

Clear Opening Height: 1962mm

4 x 30 wide x 2mm thick x 2400mm plate in RAL 7047

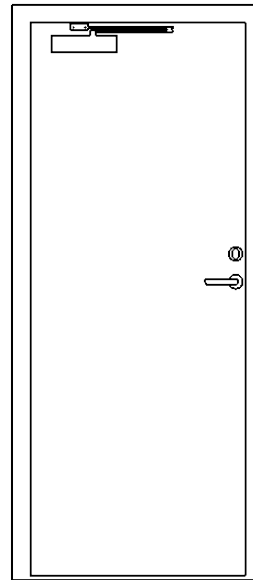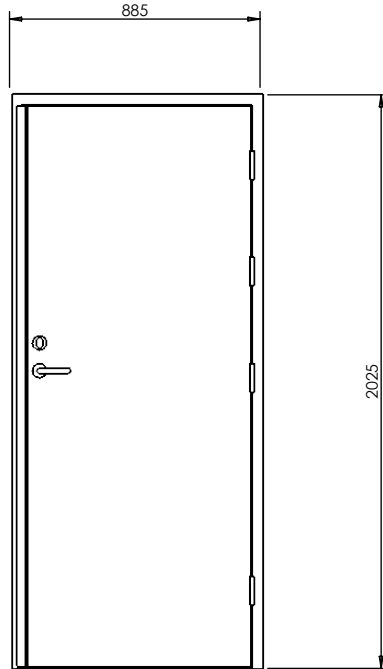

Pull Side

Push Side

Hinge positions and quantities are for representation only and will vary compared to the finished door in order to maintain certification

The Contractor shall Review, Approve, or Submit changes to be made to the drawings. Upon approval of the drawings by the Contractor, it destitutes responsibility for errors in the drawings to the manufacturer This Drawing must be read in conjunction with the appropriate quotation. Any errors or differences must be notified to the manufacturer prior to approval of either document.

Revision Notes

ORDER REF: WO 5286380 EBP

QUOTE No: 81273-1-1

SECURITY DIRECT

DRAWING REVISION: 1


DOOR REF:

CUSTOMER:

DATE: 01/11/2023

DRAWN BY: Jason Gillespie

SITE REF:



Ali 564a