



Security Direct
property protection



Large Product Range ☐
Competitive Prices ☐
25 years Experience ☐

Sliding Folding Shutters



SECURITYDIRECT
Specialist Security Solutions

Sliding Shutters - Manual

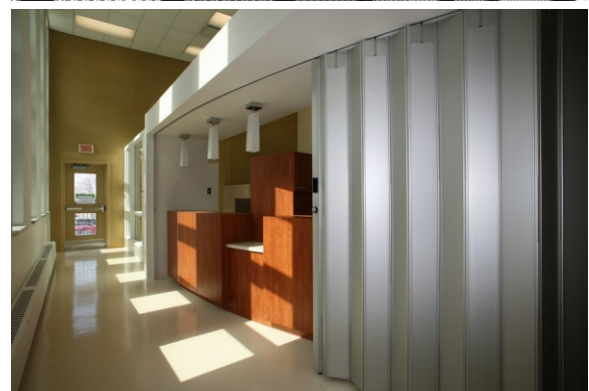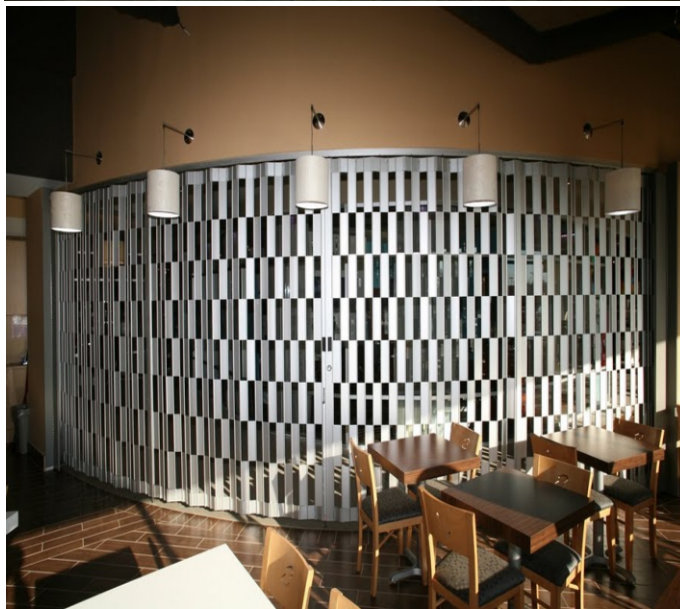

Key Benefits

- Shopping Centres, Retail, Bars, Serveries
- Solid, Perforated, Brickbond and Polycarbonate Options
- Up to 80m wide
- Top Running - No Bottom Track
- Can go around 45 and 90 degree bends
- 5 Standard Colours
- 4 week lead time (Subject to change)

Sliding Shutters - Manual



Product Overview

Description

With no floor tracks required, the Sliding Shutters are suspended from a continuous overhead track and are manually operated in a slide-aside action. They do not require removable mullions or fixed posts as all components, including locking mechanisms, are integral. The Sliding Shutters are ideal when there is not enough headroom for a roller shutter. The sliding shutters is that they can cover widths up to 80m wide and they can go around 45 and 90 degrees curves.

Common use

Shopping Centres, Retail, Bars, Serveries

Maximum Width

80m

Maximum Height

4200mm

Weight

12kgs m/2

Standard Finish

Natural Anodised, Black, White, Medium Bronze, Light Bronze

Lead Time

20 working days (subject to change)




Specification

CURTAIN SLAT


The top and bottom of each panel section is fitted with an aluminium panel 102mm high. This panel consists of an aluminium extrusion 2mm thick. It is connected into extruded hinge cleats with a 15% offset to facilitate easy folding.

The curtain is constructed of 152mm wide modules linked together by a continuous aluminium hinge. These hinges hold different curtain designs created by using different infills e.g. Solid, Perforated, Brickbond and Polycarbonate.


SOLID

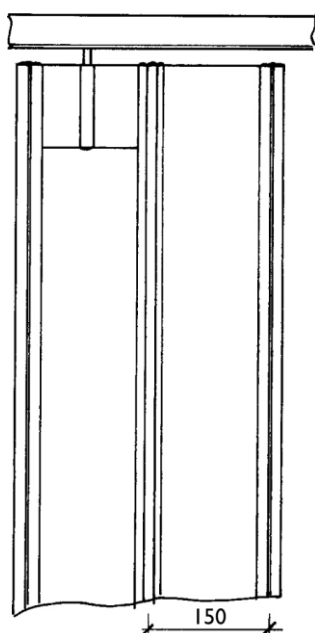


PERFORATED

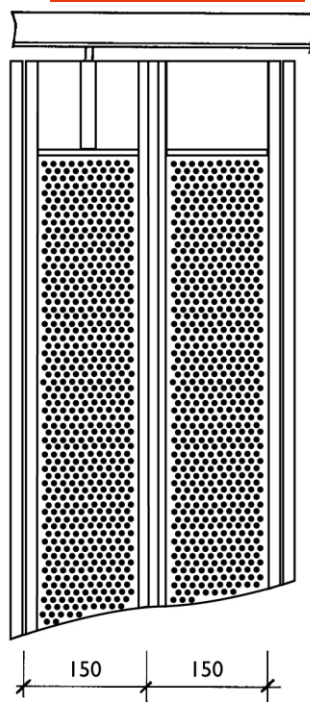


POLYCARBONATE

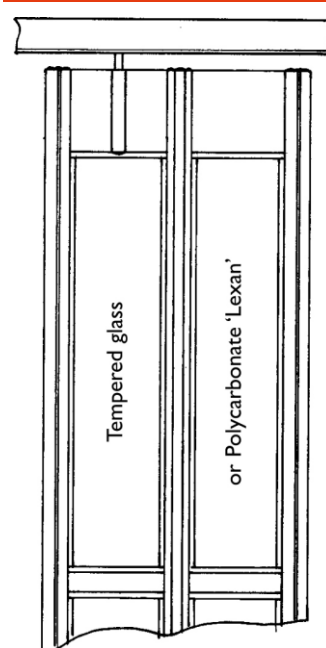

BRICKBOND

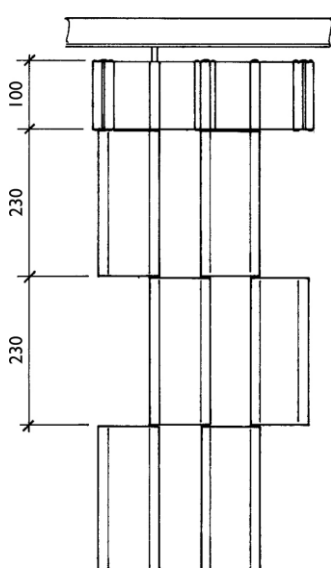


BRICKBOND

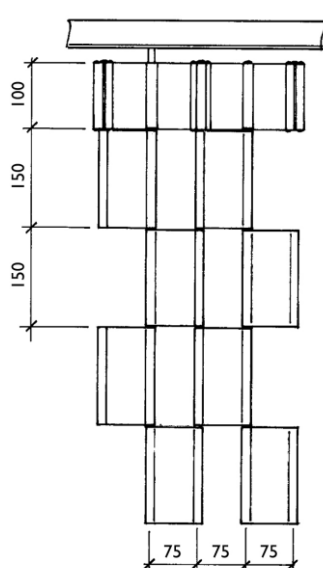





Specification

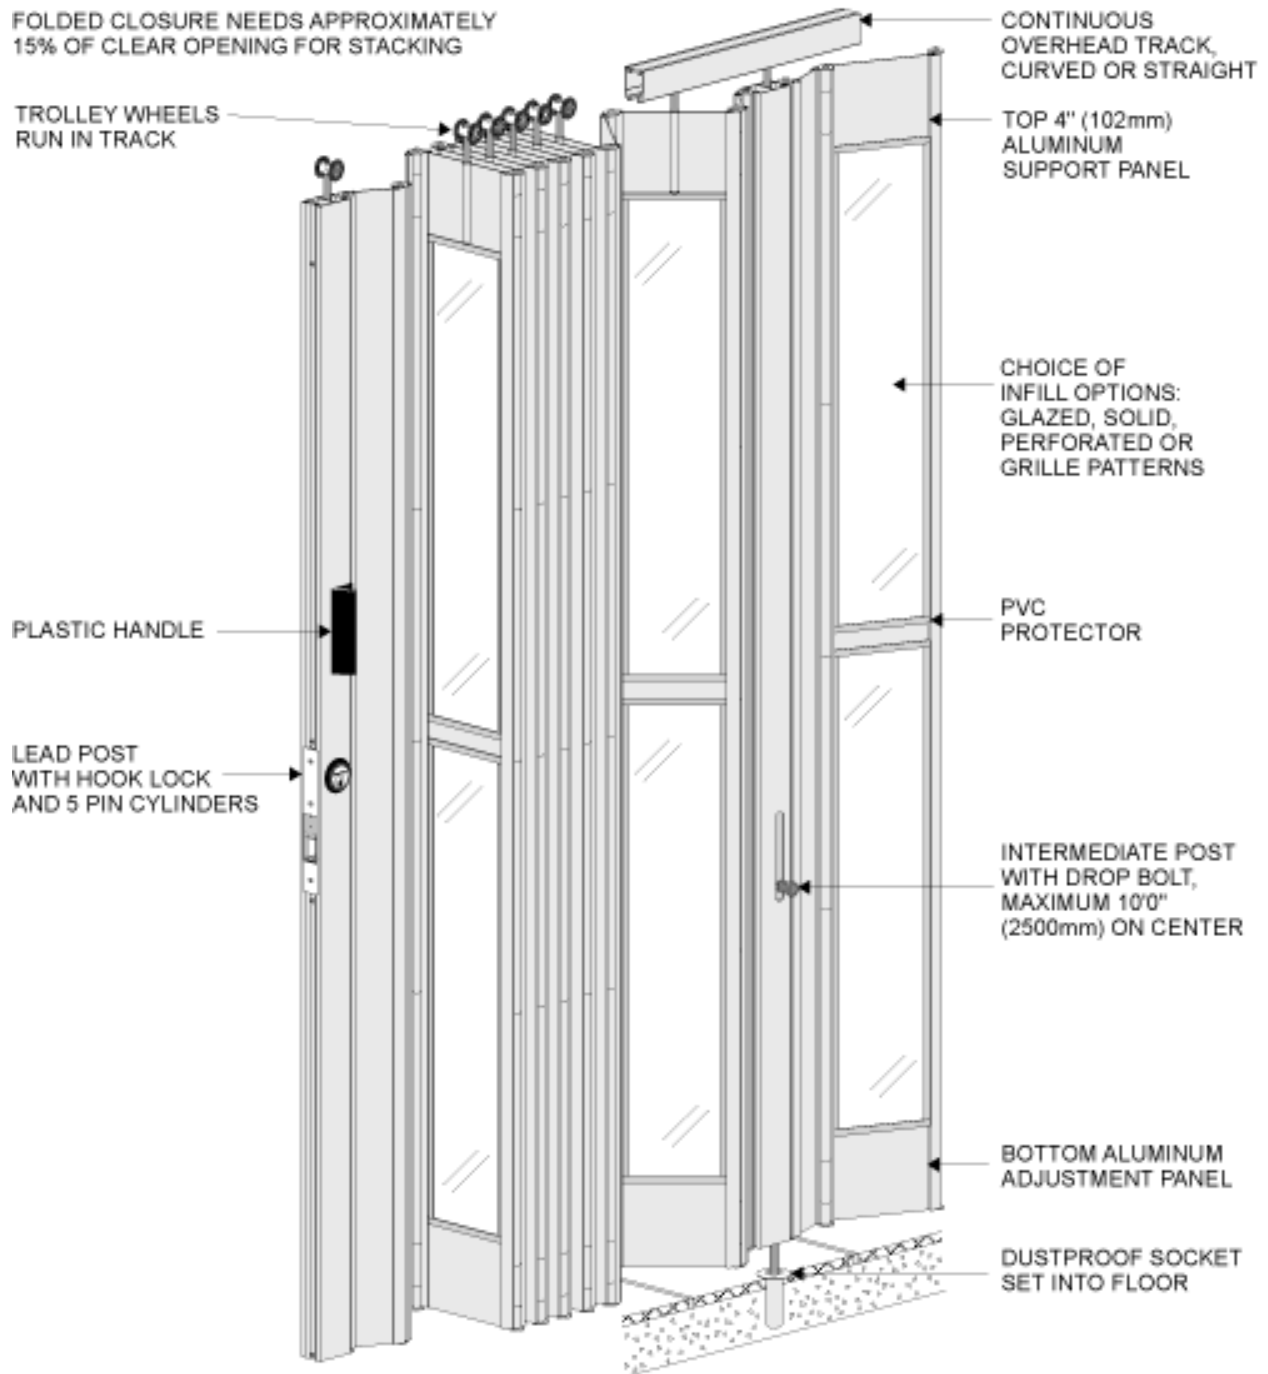



Specification

POCKET REQUIREMENTS

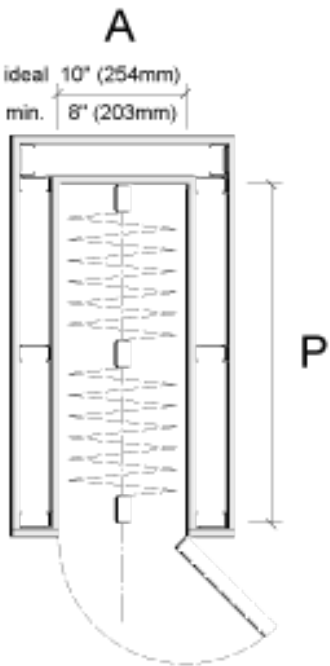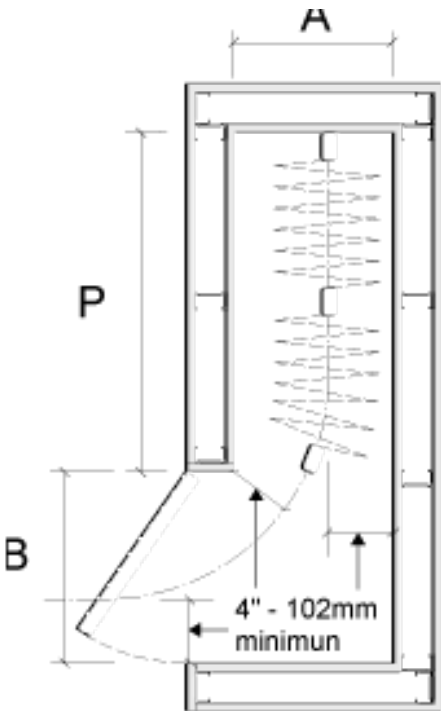

	Radius 14" - 356mm	Radius 10" - 254mm
A	B	B
8" - 203mm	18" - 457mm	14" - 356mm
9" - 229mm	14" - 356mm	11" - 279mm
10" - 254mm	12" - 305mm	10" - 254mm
12" - 305mm	11" - 279mm	9" - 229mm

A: Interior pocket width, width 10" - 254mm is recommended with a standard 14" - 356mm radius and B at 12" - 305mm

B: Pocket entrance width

P (minimum stacking) = 1,15" per linear foot + 3" per post or 95mm per linear meter + 76mm per post



4" - 102mm min clearance both sides of track.
If a pocket door is used, the door must not obstruct the entry dimension given.






Specification

TRACKS AND CURVES


TRACK

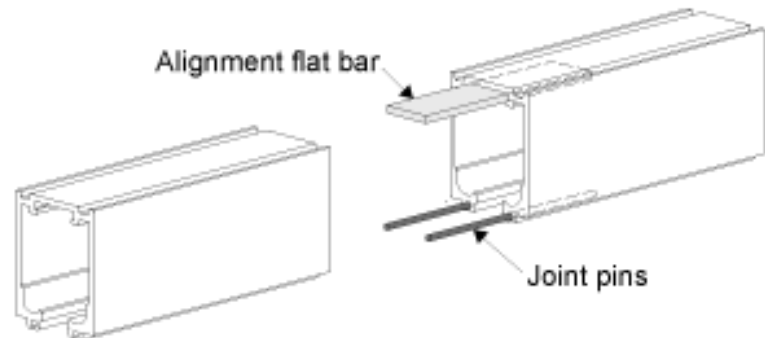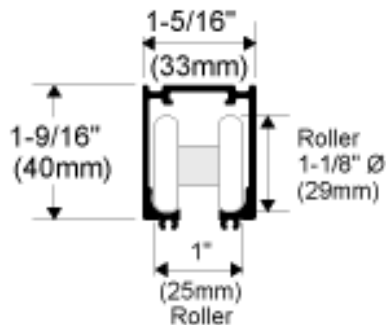


STANDARD CURVES

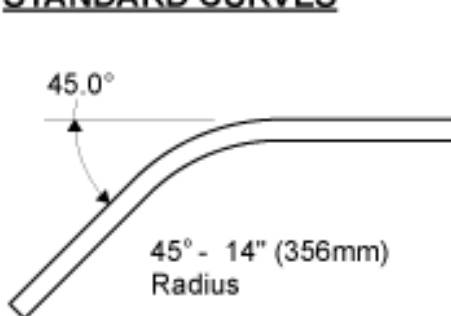

SITE CUT AT ANY ANGLE

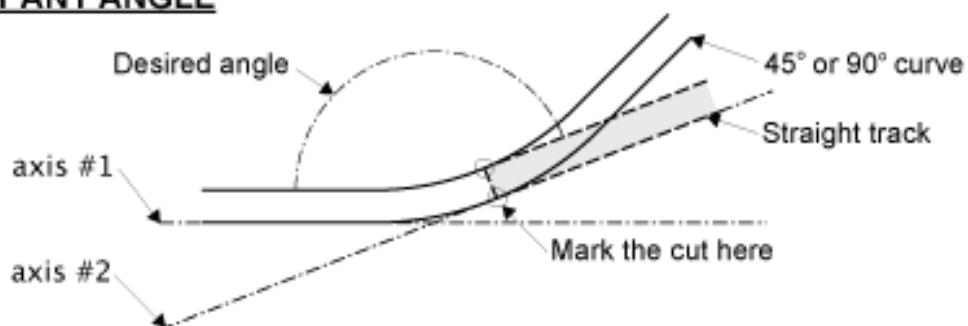

SPECIAL CURVES

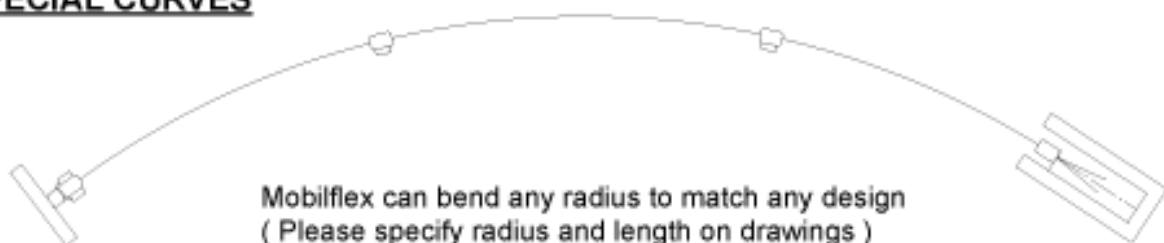




Sliding Shutters - Manual

Specification

VERTICAL SECTION


EXPOSED TRACK

TRACK SUPPORT BY OTHERS
MINIMUM CAPACITY 3 lb/sq.ft
(15 kg/sq.m) OF GRILLE

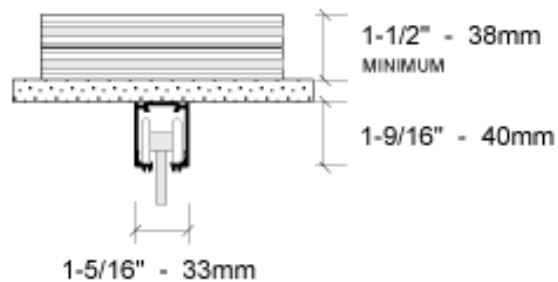

RECESSED TRACK

LEAVE $\pm 1/8$ " (3mm)
CLEARANCE ON
EACH SIDE OF TRACK
DO NOT PINCH TRACK
OR SEAL WITH CEILING

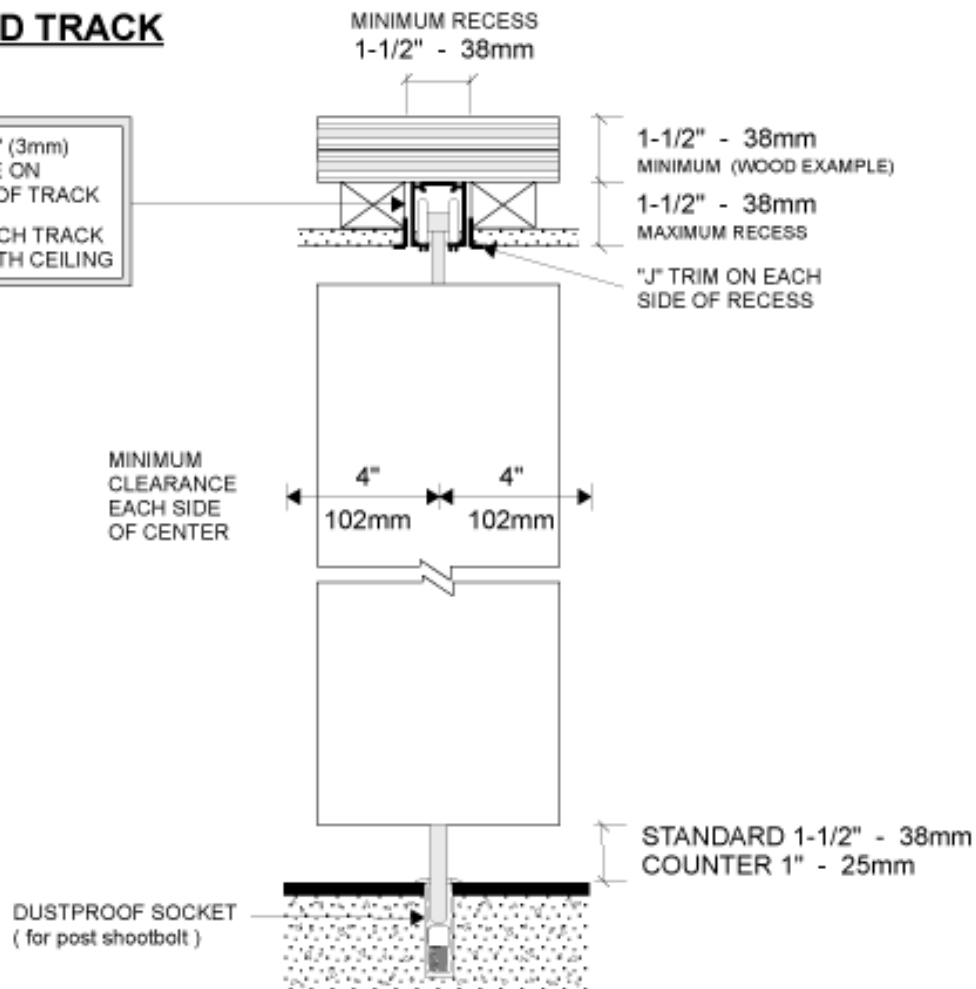




Specification

LOCKING POSTS

All posts are integral - fully joined to the rest of the grille or closure except No (9)

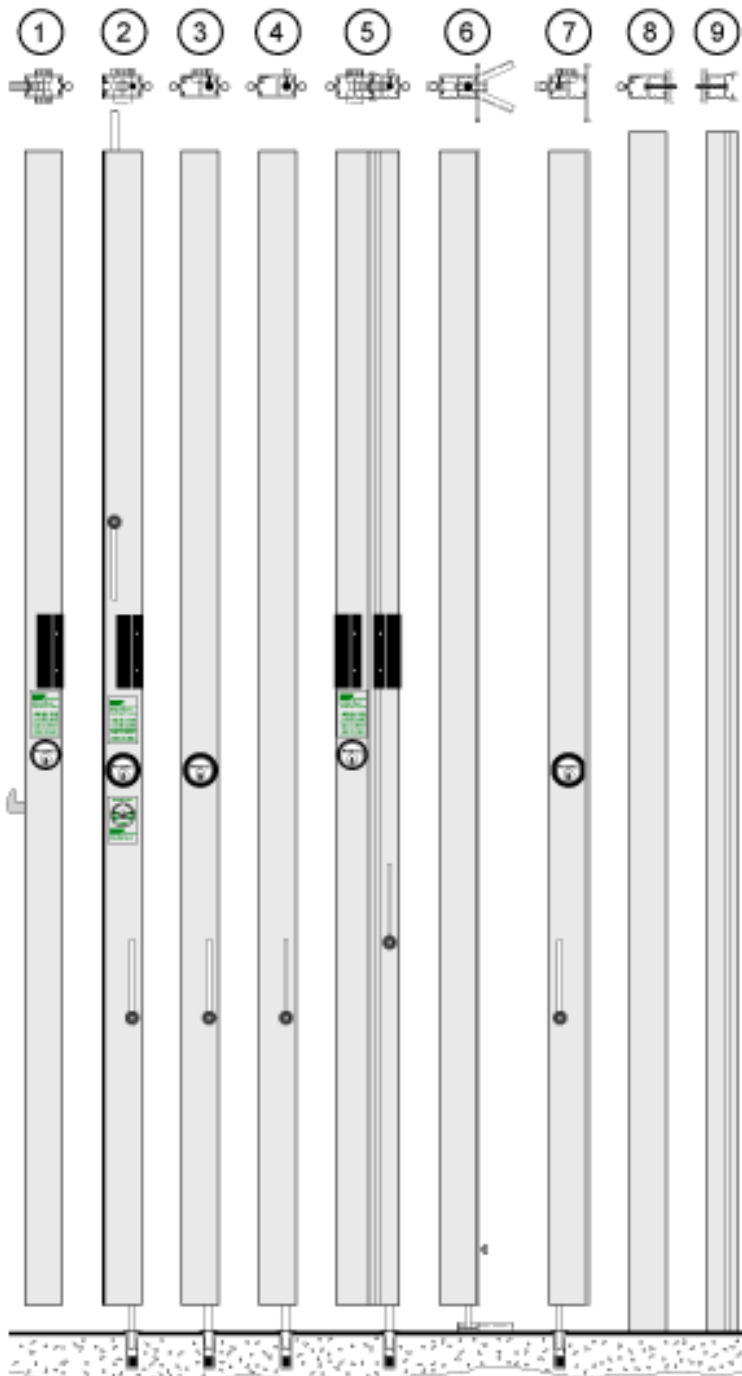


- ① Lead post with hook lock and cylinder lock(s)
- ② Lead post with top and bottom shootbolts and cylinder lock(s)
- ③ Intermediate post with bottom shootbolt and cylinder lock
- ④ Intermediate post with bottom shootbolt and knob
- ⑤ Bi-part assembly with bottom shootbolt and cylinder lock(s)
- ⑥ Floating end post with top stop and bottom "V" stop fitted to floor
- ⑦ Floating end post with bottom shootbolt and cylinder lock
- ⑧ Fixed end post
- ⑨ Wall striker post (jamb)



Specification

FLOOR OR COUNTER SOCKET


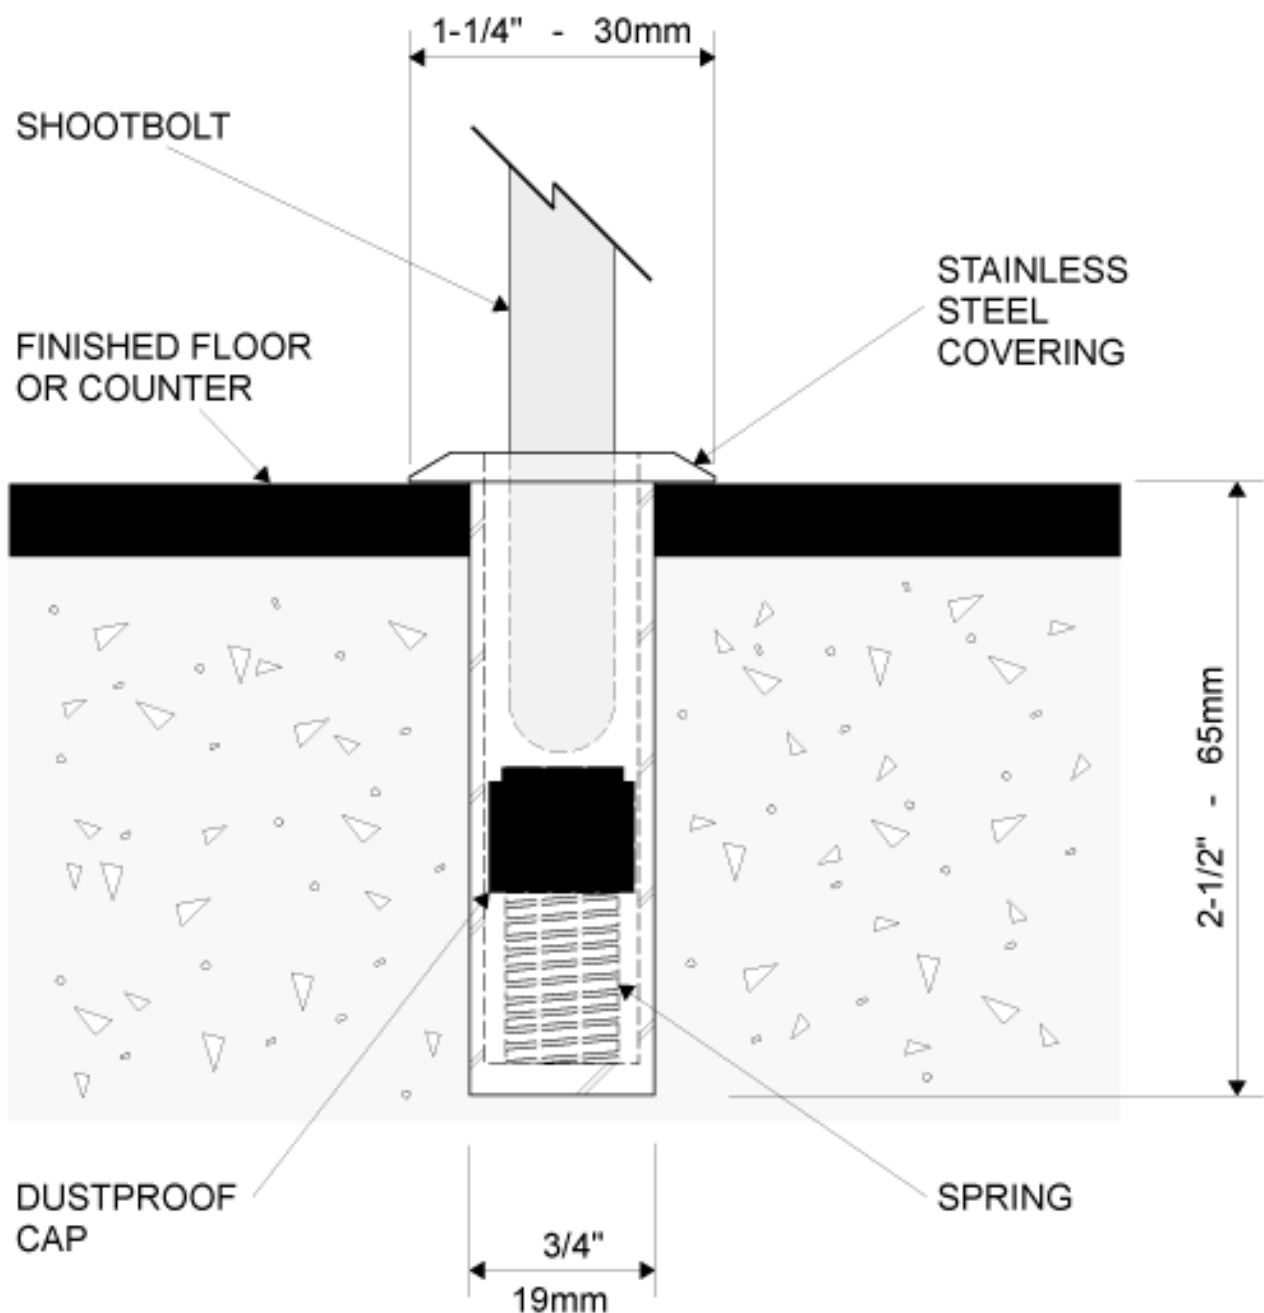





Specification

ALTERNATIVE STACKING ARRANGEMENTS


STRAIGHT POCKET, IN LINE STACKING

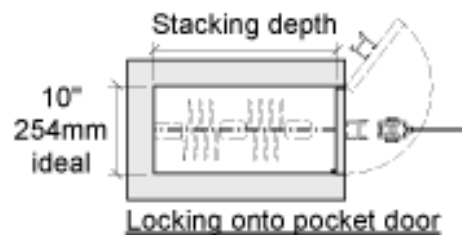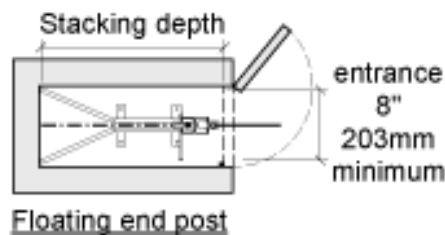



90° POCKET STANDARD CURVE 14" (355mm) RADIUS (2 Examples)

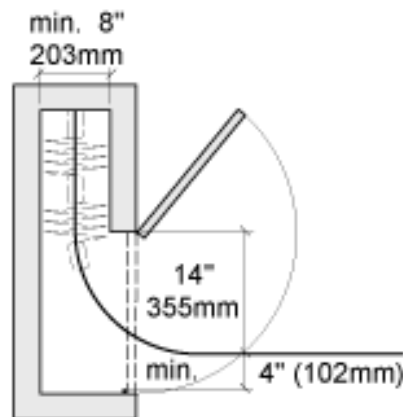


or

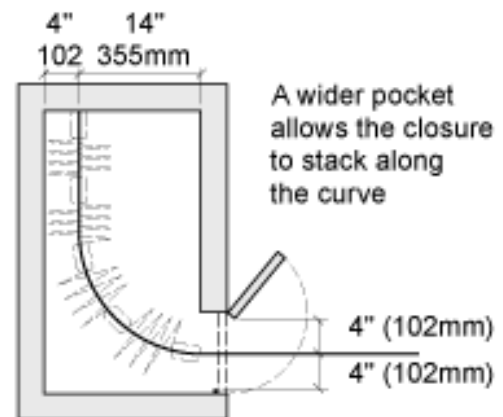

COMBINED POCKET FOR 2 CLOSURES

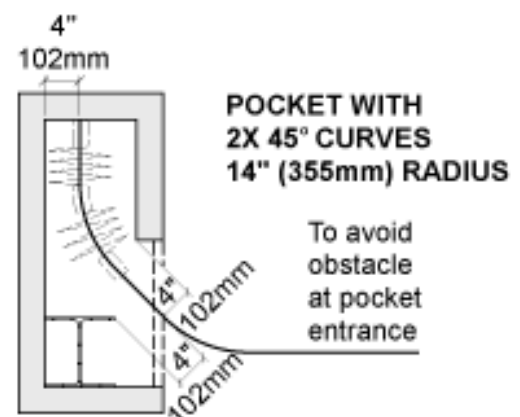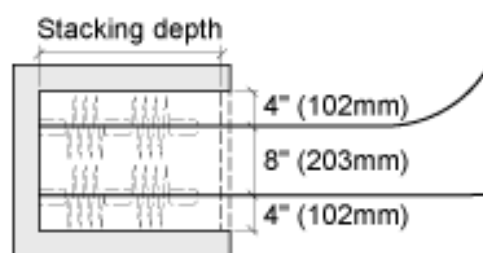


BETWEEN JAMBS, NO POCKET

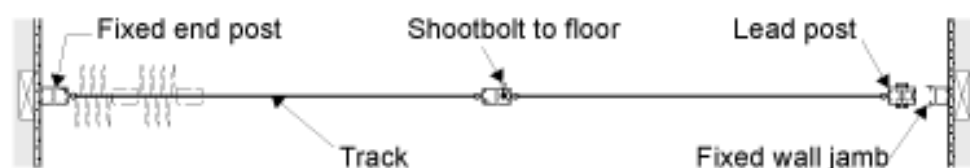



Specification

ALTERNATIVE STACKING ARRANGEMENTS

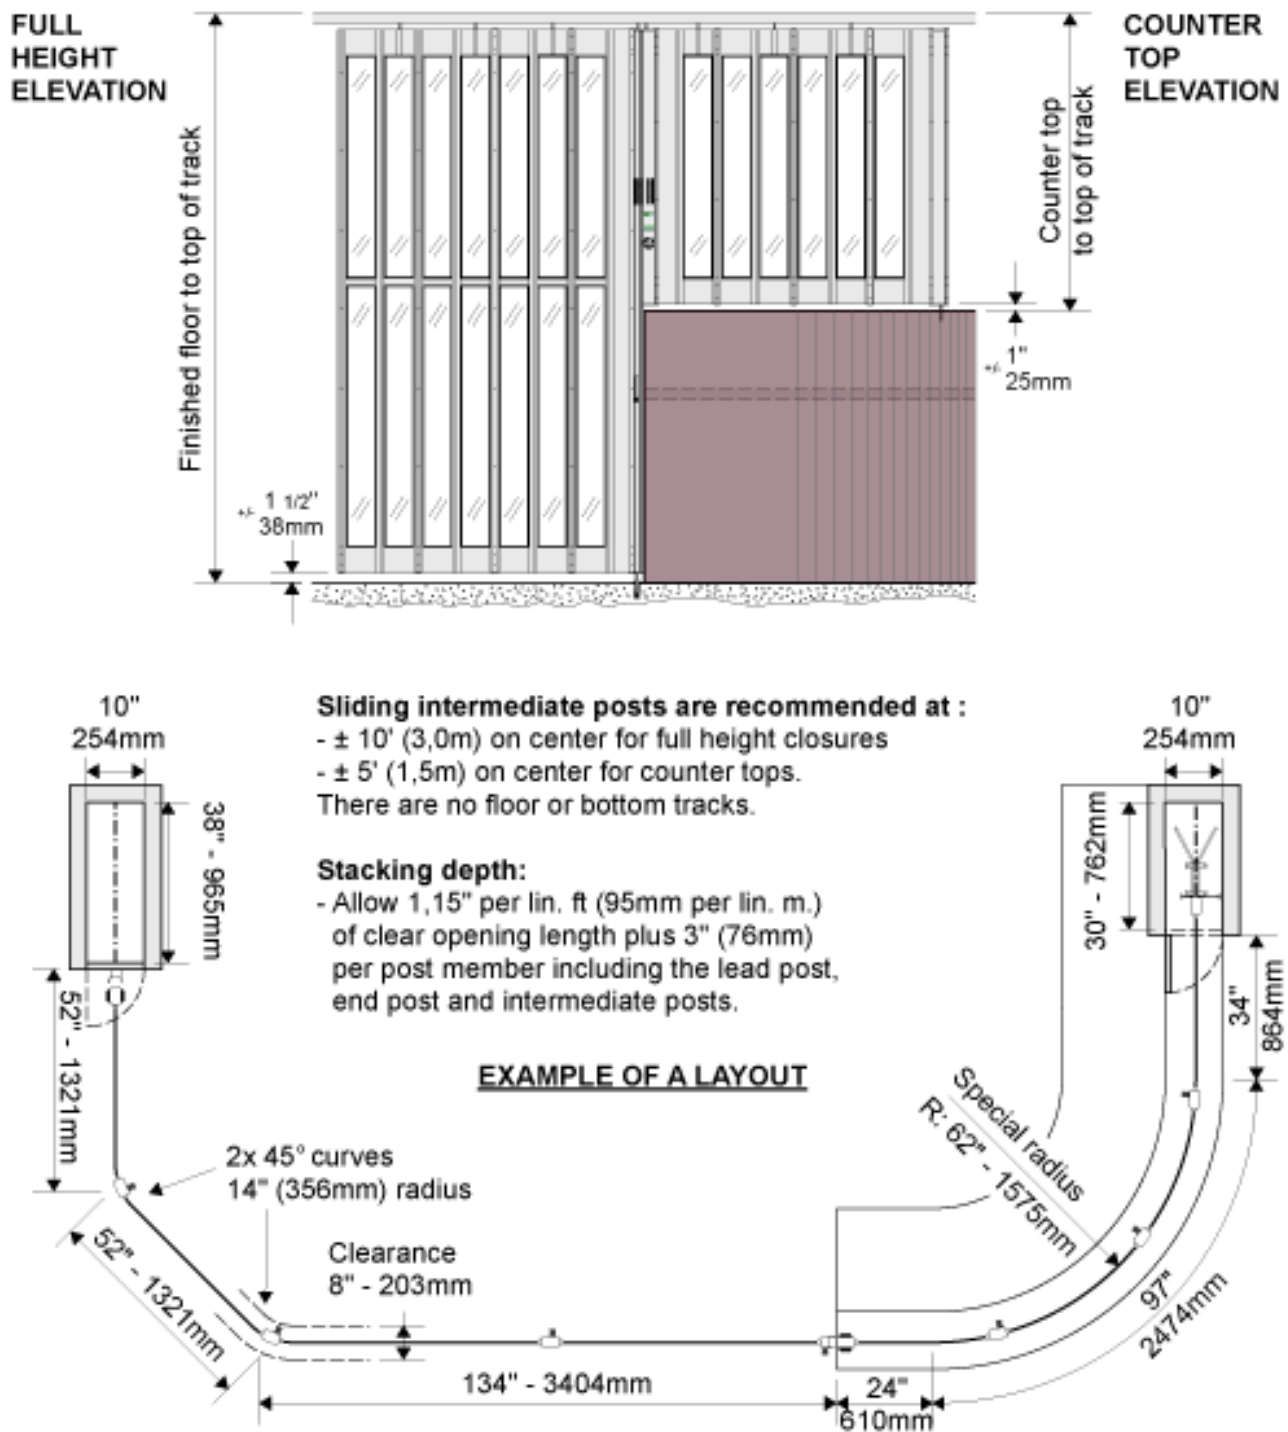




Colours


Colours - The standard finish is Anodised Silver. Other finishes available at an extra cost.



1
CLEAR ANODIZED



2
ACRYLIC PAINT
BLACK



3
ACRYLIC PAINT
WHITE



40
ACRYLIC PAINT
MEDIUM BRONZE



26
ACRYLIC PAINT
LIGHT BRONZE