




Security Direct
property protection

Large Product Range ✓
Competitive Prices ✓
25 years Experience ✓

StackDoor
Security Rated
LPS1175 Security Level 1



SECURITY DIRECT
www.securitydirectuk.com

Stack Door - LPS1175 SR1



Key Benefits

- Independently Tested by the Loss Prevention Certification Board (LPCB)
- Tested to LPS1175 Security Level 1
- Secured By Design - Police preferred specification
- 80% Vision/Air Flow
- Stacks vertically - small stacking size
- Can stack around Shapes and Corners
- Tube or Outboard Motor available
- Steel and Stainless Steel laths available
- 5-6 week lead time (Subject to change)

Secured by Design



Police Preferred Specification

Stack Door - LPS1175 SR1



Product Overview

Description

A high security stacking grille shutter, providing 80% Vision and a high level of security.

Common use

Shop Fronts, Car Parks

Maximum Width

6240mm

Maximum Height

1000mm

Weight

25kgs m/2

Standard Finish

Zinc Plated Steel as standard. Stainless Steel or Powder coated at an extra cost.

Lead Time

5-6 weeks

Specification

GRILLE LATTICE

Stainless or zinc plated steel pins secured into horizontal stainless, zinc plated or powder coated profiles.




Stack Door - LPS1175 SR1



Specification

GUIDE RAILS

Reinforced extruded aluminium guide rails anchored direct into the structure. On larger opening there may be double guides on each side. Each guide rail has a chain drive built into the guides, which is attached to the axle.

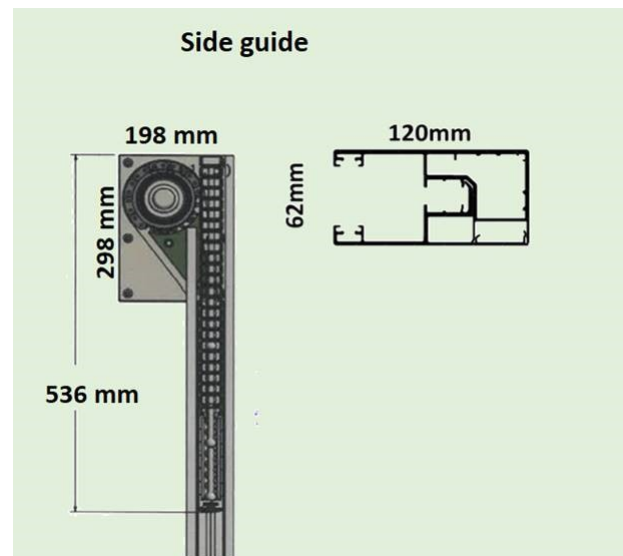

OPERATION

LIGHT USAGE:- Electric, Tubular Motor: Tubular motor with internal rocker or external key switch as standard & safety brake as appropriate to comply with legislation. Manual override facility & crank handle as required (surcharge applies).

HIGH SPEED OR HIGH USAGE:- 3 Phase (415V) Outboard Motor: Three phase motor with safety brake, chain manual override & TS959 push button control station as standard.



Both tubular & outboard motors have numerous control option variants such as group, remote or mobile phone activation.

CE Compliant to all applicable directives and regulations.

Stack Door - LPS1175 SR1



Specification

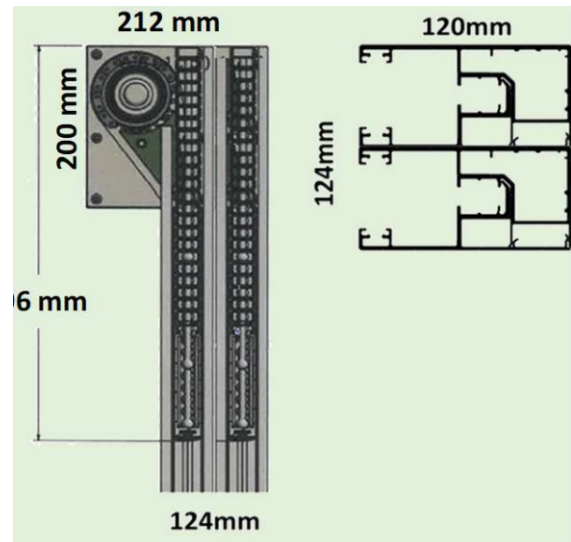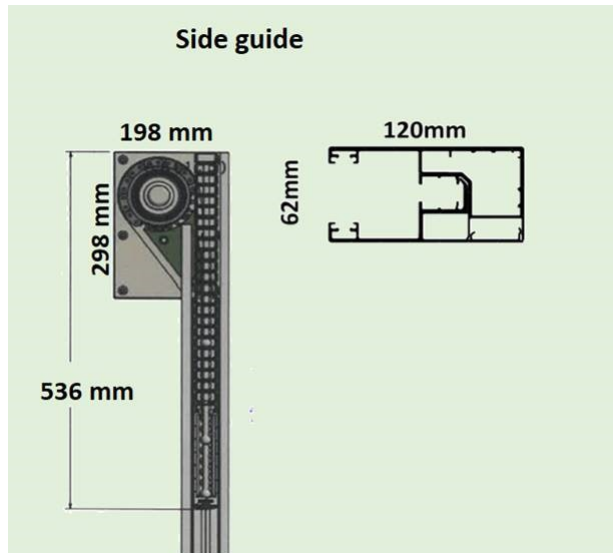

Stackdoor Corner: 6695 x x 3475 mm (width x depth x height)

Overall size width x depth **6695 x mm**

Overall size height: **3475 mm**

Day size wide: **6513 x -182 mm**

Day size height: **2939 mm**

Packet size **536 mm**

