


E130 Elite (SR5 / E10)

LPCB Rated Security Shutter

The E130 Elite (SR5) offers an exceptional level of security in an innovative and lightweight aluminium design. Advanced features such as anti-cut bars and an anti-lift section have helped this shutter achieve a market-leading SR5 / E10 rating from the Loss Prevention Certification Board (LPCB), according to the latest LPS 1175: Issue 8 standard. Suitable for high-risk openings of all sizes up to 10m wide.

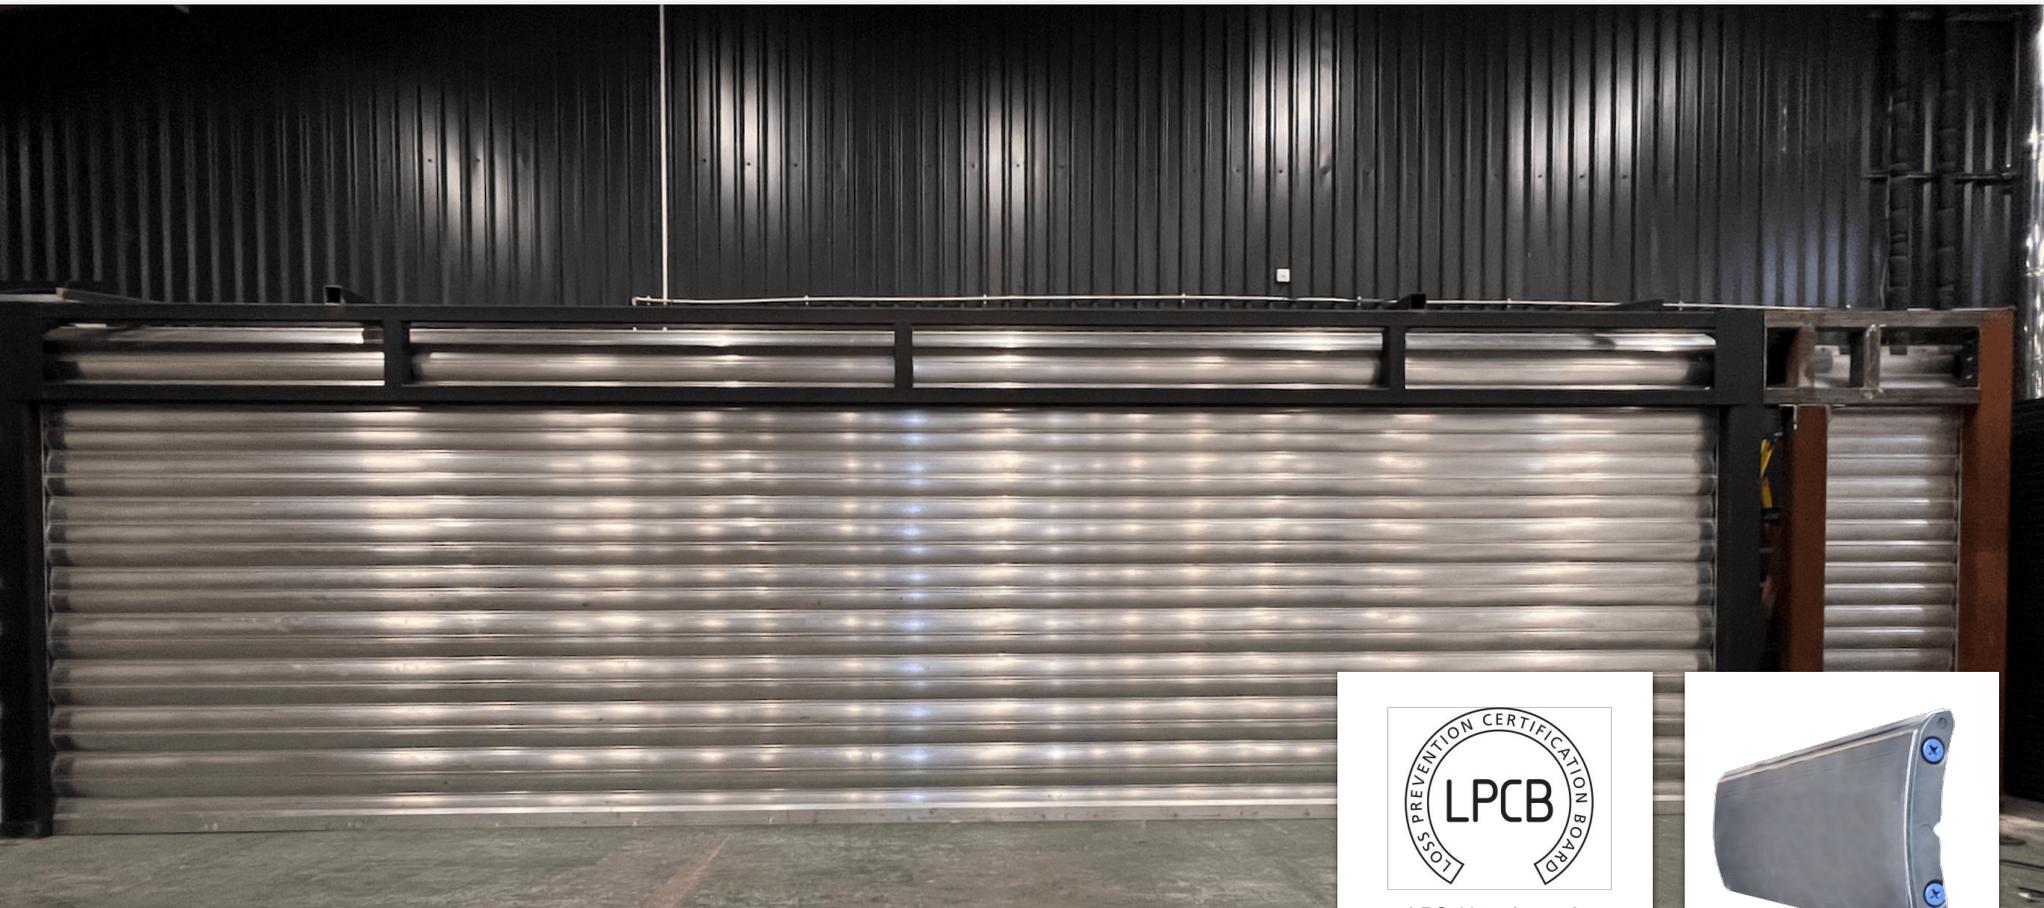

LPS 1175: Issue 8
Cert/LPCB ref: 931d/01



APPLICATIONS

For openings requiring the highest level of protection, assurance is provided via an SR5 rating from the LPCB (LPS 1175). Suitable for internal face fit.

CURTAIN SLAT

Double-skinned extruded aluminium slat containing state-of-the-art anti-cut bars. An additional anti-lift profile eliminates the need for additional locking systems.

Slat Face:	115mm + 30mm anti-lift profile
Weight per m ² :	32kg
Maximum Width:	10m
Maximum Area:	90m ²

ENCLOSURE

Not provided as standard. Steel casing available on request.

Guide Height (mm)	Plate Size (mm)
3000	400 (tubular motor only)
4800	450
6200	500
7800	550
9800	600

Plate sizes shown as a guide only and may vary.

BOTTOM SLAT

Extruded aluminium bottom slat with solid aluminium defenders.

GUIDE CHANNELS

Extruded aluminium guide channels with rubber weather seal. Width of 120mm.

FINISH

The E130 can be powder coated to any RAL / BS colour reference.

OPERATION

Tubular Motor: With internal rocker switch or external key switch and safety brake as appropriate to comply with legislation. Manual override facility & crank handle as required (surcharge applies).

Outboard Motor: GfA single or three phase motor with integrated safety brake, chain manual override and push button control station as standard.


All motors have numerous control option variants such as remote and group or mobile phone activation.

UKCA and CE compliant to all applicable directives and standards.


E130 Elite (SR5 / E10)

LPCB Rated Security Shutter



TUBULAR MOTOR

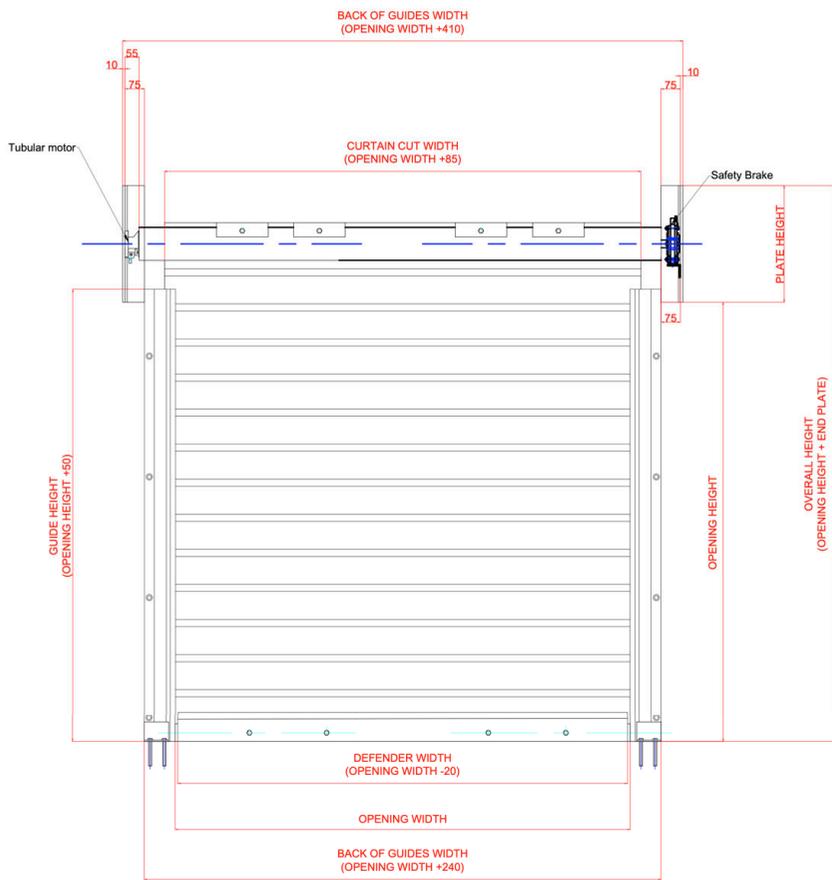


Suitable for Internal Face Fit Only:

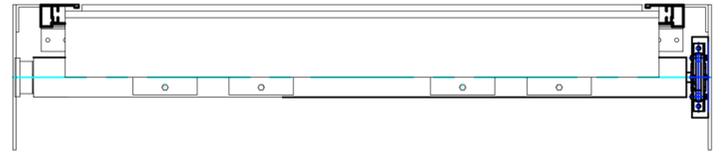

OUTBOARD MOTOR

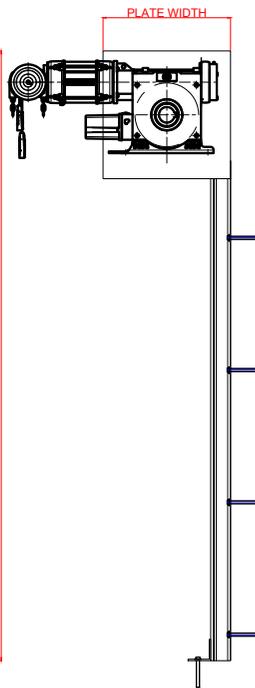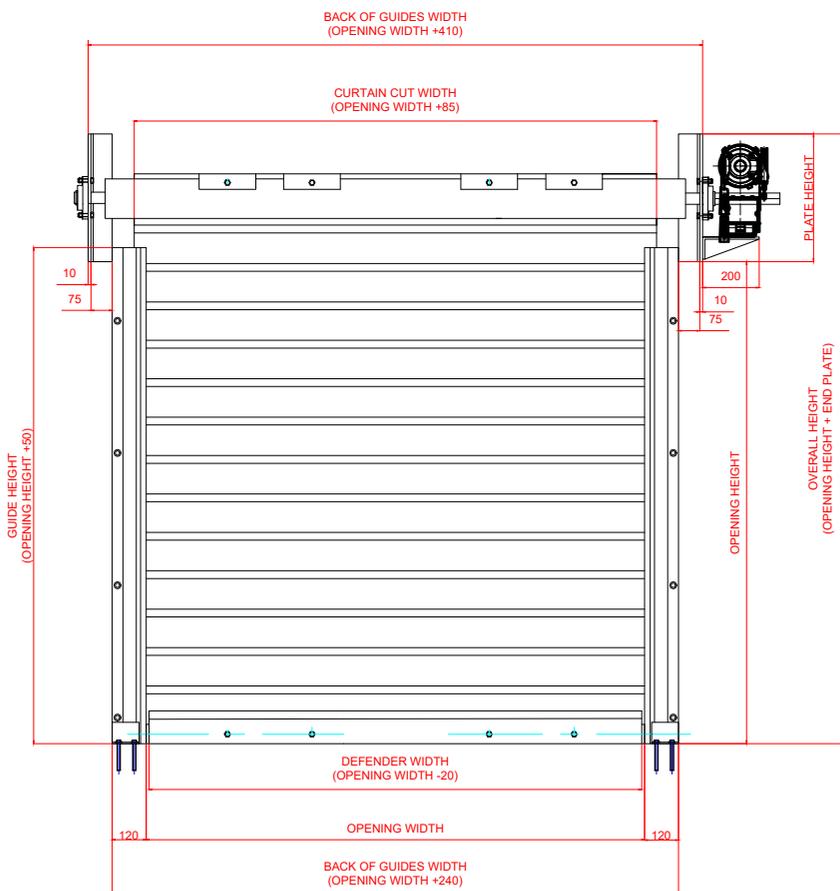


Suitable for Internal Face Fit Only:

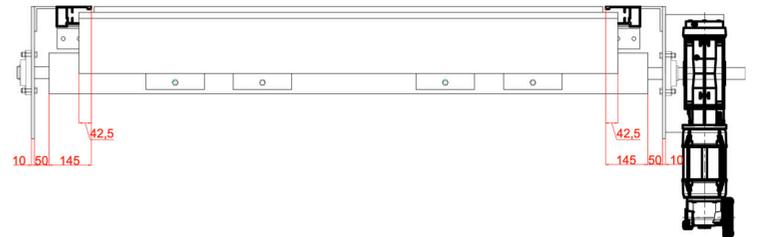

SLAT PROFILE & QUIRK

Aluroll anti-cut technology incorporated

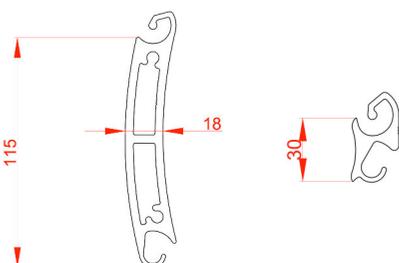

GUIDE CHANNELS

